


# **A.39 Recessed Sharping Emission - Structural Module Trim - 1184mm - 36° - 4000K - Undimmable/Dimmable DALI - 2x4 Optics - White**

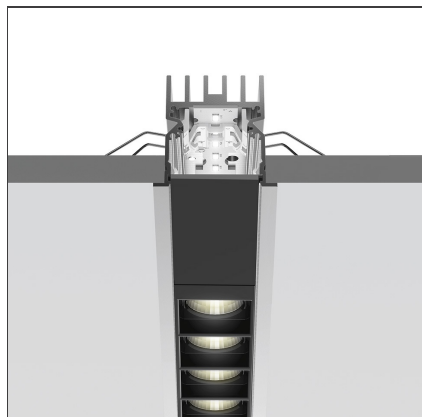


IP 20  Dimmerable: +  -

## **DESIGN BY**

Carlotta de Bevilacqua

## **DESCRIPTION**

## **TECHNICAL DRAWINGS**

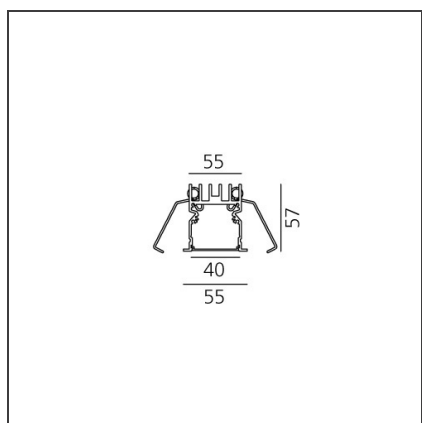

## **FEATURES**

Article Code:	BH20301	Series:	Indoor
Colour:	White	Emission:	Direct
Installation:	Recessed		

## **DIMENSIONS**

Length:	cm 118
Width:	cm 5.5
Recessed depth:	cm 5.7

## **INCLUDED SOURCES**

Category:	LED	Color temperature (K):	4000K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	22W	Service Life:	L90 (20K) 118000h
Type:	0		

## **LUMINAIRE**

Watt:	22W	Delivered lumens output (lm):	1651lm
		CCT:	4000K
		Efficiency:	71%
		Efficacy:	75.03lm/W
		CRI:	90
		Dimmable Typology:	Dali

## **Notes**

Driver 900mA SELV and screen supplied separately. Depending on the driver, the luminaire can be dimmable DALI or undimmable. \*Driver uses 1 DALI address


## ACCESSORIES



Louvre - 1184mm  
2x4 optics white  
AE40001



Louvre - 1184mm  
2x4 optics black  
AE40004




Driver 60W -  
900mA - 220-240V  
- Undimmable  
DV1024



A.39 Recessed -  
Trim End Cap (Kit  
2x) - Up to 5m -  
White  
AT09001



A.39 Recessed -  
Trim End Cap (Kit  
2x) - Up to 15m -  
White  
AT09101



Driver 25W -  
900mA - 220-240V  
- Undimmable  
DV1022



A.39 Recessed -  
Trim End Cap (Kit  
2x) - Up to 35m -  
White  
AT09201