



# **A.39 Recessed Sharping Emission - Structural Module Trimless - 2368mm - 20° - 3000K - Undimmable/Dimmable DALI - 4x4 Optics**

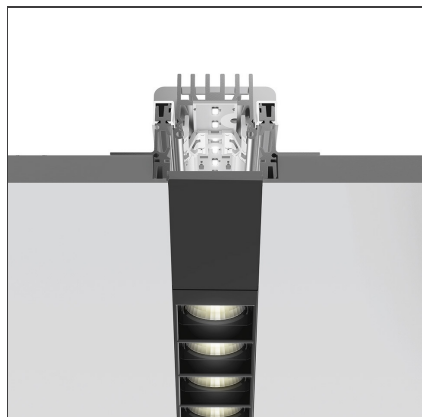


IP 20  Dimmerable: 

## **DESIGN BY**

Carlotta de Bevilacqua

## **DESCRIPTION**

## **TECHNICAL DRAWINGS**

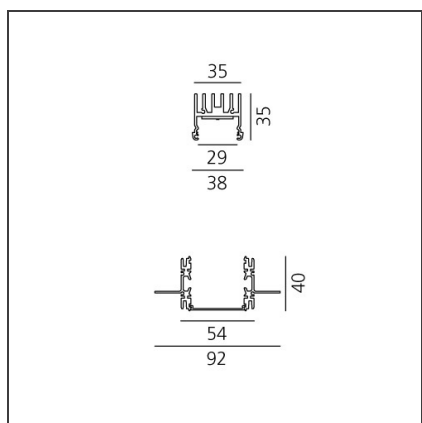

## **FEATURES**

|               |          |           |        |
|---------------|----------|-----------|--------|
| Article Code: | BH26001  | Series:   | Indoor |
| Installation: | Recessed | Emission: | Direct |

## **DIMENSIONS**

|                 |        |
|-----------------|--------|
| Length:         | cm 237 |
| Width:          | cm 5,4 |
| Recessed depth: | cm 4   |

## **INCLUDED SOURCES**

|           |     |                        |                   |
|-----------|-----|------------------------|-------------------|
| Category: | LED | Color temperature (K): | 3000K             |
| Number:   | 1   | Color Tolerance:       | MacAdam 2SDCM     |
| Watt:     | 44W | Service Life:          | L90 (20K) 118000h |
| Type:     | 0   |                        |                   |

## **LUMINAIRE**

|       |     |                               |           |
|-------|-----|-------------------------------|-----------|
| Watt: | 44W | Delivered lumens output (lm): | 3297lm    |
|       |     | CCT:                          | 3000K     |
|       |     | Efficiency:                   | 76%       |
|       |     | Efficacy:                     | 74.93lm/W |
|       |     | CRI:                          | 90        |
|       |     | Dimmable Typology:            | Dali      |

## **Notes**

Driver 900mA SELV and screen supplied separately. Depending on the driver, the luminaire can be dimmable DALI or undimmable. \*Driver uses 1 DALI address



**ACCESSORIES**



Louvre - 2368mm  
4x4 optics white  
AE42001




Louvre - 2368mm  
4x4 optics black  
AE42004

NO  
IMAGE  
AVAILABLE

Sharping wall  
grazer lens Kit  
(4pcs) - 26°x70°  
elliptical lenses kit.  
It has to be used  
on top of S 20°  
reflectors to get  
an elliptical beam  
(greter axis along  
the module  
lenght). It contains  
4 lenses.  
AF06000



Driver 25W -  
900mA - 220-240V  
- DALI  
DV1026



Driver 60W -  
900mA - 220-240V  
- DALI  
DV1028

NO  
IMAGE  
AVAILABLE

End Cap (x2)  
AT09301

NO  
IMAGE  
AVAILABLE

Trimless recessed  
frame - lenght  
2368mm  
BH30500



Trimless frame  
end cap (x2)  
BH30700