


# **A.39 Recessed Sharping Emission - Structural Module Trimless - 2368mm - 20° - 4000K - Undimmable/Dimmable DALI - 6x4 Optics**

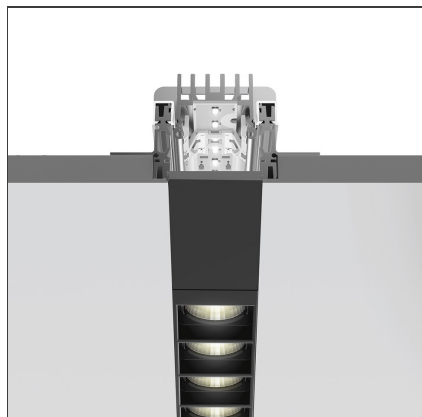


IP 20  Dimmerable: +  -

## **DESIGN BY**

Carlotta de Bevilacqua

## **DESCRIPTION**

## **TECHNICAL DRAWINGS**

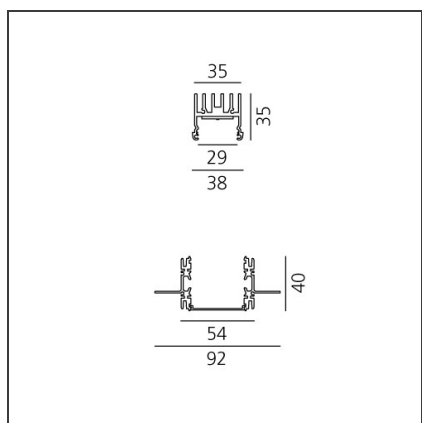

## **FEATURES**

Article Code:	BH27101	Series:	Indoor
Installation:	Recessed	Emission:	Direct

## **DIMENSIONS**

Length:	cm 237
Width:	cm 5,4
Recessed depth:	cm 4

## **INCLUDED SOURCES**

Category:	LED	Color temperature (K):	4000K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	66W	Service Life:	L90 (20K) 118000h
Type:	0		

## **LUMINAIRE**

Watt:	66W	Delivered lumens output (lm):	5292lm
		CCT:	4000K
		Efficiency:	76%
		Efficacy:	80.19lm/W
		CRI:	90
		Dimmable Typology:	Dali

## **Notes**

Driver 900mA SELV and screen supplied separately. Depending on the driver, the luminaire can be dimmable DALI or undimmable. \* Drivers use 2 DALI addresses.

## ACCESSORIES




Louvre - 2368mm  
6x4 optics - white  
AE43001




Louvre - 2368mm  
6x4 optics black  
AE43004

NO  
IMAGE  
AVAILABLE

Sharping wall  
grazer lens Kit  
(4pcs) - 26°x70°  
elliptical lenses kit.  
It has to be used  
on top of S 20°  
reflectors to get  
an elliptical beam  
(greter axis along  
the module  
lenght). It contains  
4 lenses.  
AF06000



Driver 45W -  
900mA - 220-240V  
- DALI  
DV1027



Driver 45W -  
900mA - 220-240V  
- DALI  
DV1029

NO  
IMAGE  
AVAILABLE

End Cap (x2)  
AT09301

NO  
IMAGE  
AVAILABLE

Trimless recessed  
frame - lenght  
2368mm  
BH30500



Trimless frame  
end cap (x2)  
BH30700