


A.39 Recessed - Structural Module Trimless 1184mm 3000K Undimmable



IP20

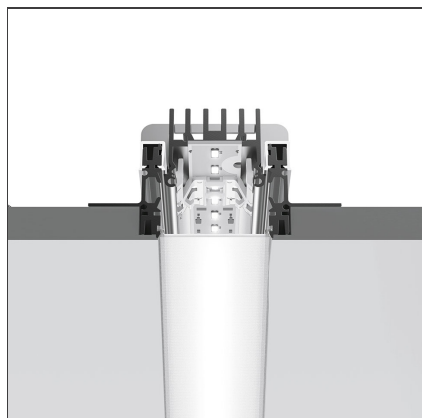


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

TECHNICAL DRAWINGS

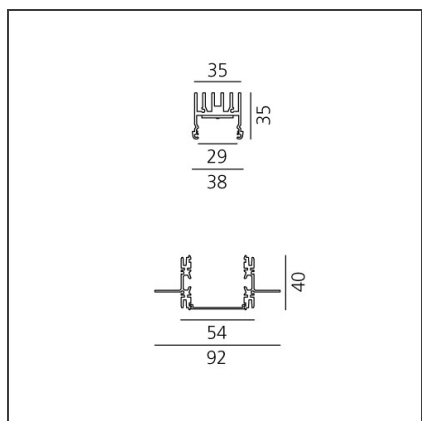

FEATURES

Article Code:	AT00100	Series:	Indoor
Colour:	Aluminium	Emission:	Direct
Installation:	Recessed		
Environment:	Indoor		

DIMENSIONS

Length:	cm 118
---------	--------

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1		
Watt:	33W		
Type:	0		
Class:	A		

LUMINAIRE

Watt:	33W	Delivered lumens output (lm):	1981lm
		CCT:	3000K
		CRI:	80

ACCESSORIES

NO
IMAGE
AVAILABLE

A.39 - Opal
Diffuser in
Polycarbonate -
L=1184mm
AT10100

NO
IMAGE
AVAILABLE

A.39 Recessed -
Trimless Frame Kit
- L=1488mm
AT04000

NO
IMAGE
AVAILABLE

A.39 - Opal
Diffuser in
Polycarbonate -
L=10000mm
AT10000

NO
IMAGE
AVAILABLE

A.39 Recessed -
Trimless Frame Kit
- L=4736mm
AT04100

NO
IMAGE
AVAILABLE

A.39 - Opal
Diffuser in
Polycarbonate -
L=2368mm
AT10200

NO
IMAGE
AVAILABLE

A.39 - Opal
Diffuser in
Polycarbonate -
L=25000mm
AT10800

NO
IMAGE
AVAILABLE

A.39 - Opal
Diffuser in
Polycarbonate -
L=50000mm
AT10900

NO
IMAGE
AVAILABLE

A.39 Recessed -
Frame Cap 2x
AT09300

NO
IMAGE
AVAILABLE

End Cap (x2)
AT09301

NO
IMAGE
AVAILABLE

A.39 - Opal
Diffuser in
Polycarbonate -
L=2960mm
AT10300