



# A.39 Suspension - Structural Module 1184mm - Direct + Indirect Emission - 3000K - Undimmable - Silver

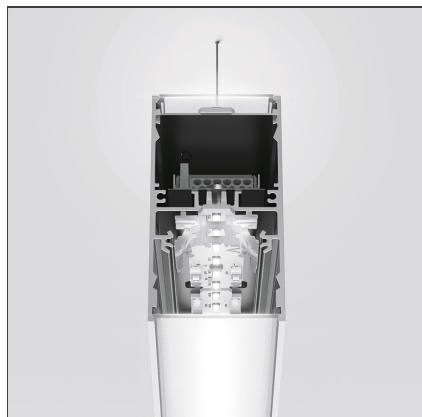

IP20 


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

## TECHNICAL DRAWINGS

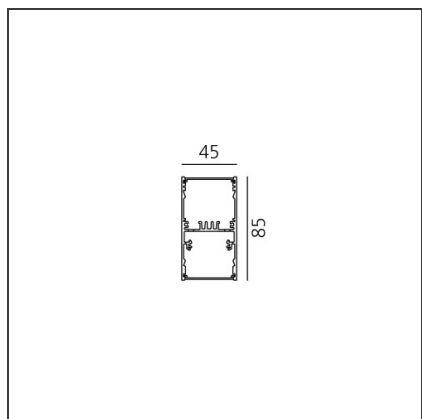

## FEATURES

Article Code:	AT19105	Series:	Indoor
Colour:	Silver		
Installation:	Ceiling		
Environment:	Indoor		

## DIMENSIONS

Length:	cm 118
Width:	cm 4,5
Height:	cm 8,5

## INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1		
Watt:	23W		
Type:	0		
Class:	A		
Category:	LED	Color temperature (K):	3000K
Number:	1		
Watt:	34W		
Type:	0		
Class:	A		

## LUMINAIRE

Watt:	34W + 23W	Delivered lumens output (lm):	1893lm + 2956lm
		CCT:	3000K
		CRI:	80

ACCESSORIES



A.39 - Mechanical joint including 1 suspension cable AT09500



A.39 - Opal Diffuser in Polycarbonate - L=10000mm AT10000



A.39 - Undimmable Feeding kit including 2 suspension cables (3 poles) 2000mm (H) AT10400



A.39 - Opal Diffuser in Polycarbonate - L=1184mm AT10100



A.39 - Opal Diffuser in Polycarbonate - L=25000mm AT10800



A.39 - Opal Diffuser in Polycarbonate - L=50000mm AT10900



A.39 - End Cap (Kit 2x) - Silver AT09405