


**A.39 Suspension - Structural Module 1184mm - Direct + Indirect Emission - 4000K - Undimmable - Silver**

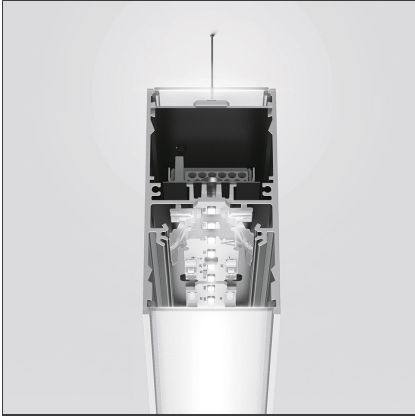

IP20


**DESIGN BY**

Carlotta de Bevilacqua

**DESCRIPTION**

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

**TECHNICAL DRAWINGS**

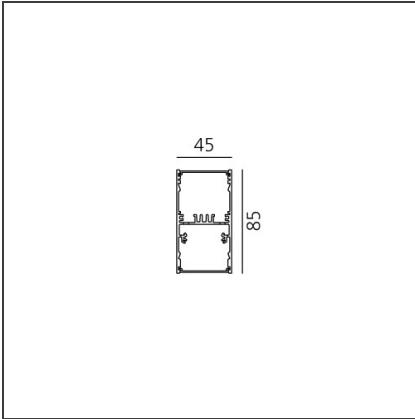

**FEATURES**

<b>Article Code:</b>	AT19305	<b>Series:</b>	Indoor
<b>Colour:</b>	Silver		
<b>Installation:</b>	Ceiling		
<b>Environment:</b>	Indoor		

**DIMENSIONS**

<b>Length:</b>	cm 118
<b>Width:</b>	cm 4.5
<b>Height:</b>	cm 8.5

**INCLUDED SOURCES**

<b>Category:</b>	LED	<b>Color temperature (K):</b>	4000K
<b>Number:</b>	1		
<b>Watt:</b>	23W		
<b>Type:</b>	0		
<b>Class:</b>	A		
<b>Category:</b>	LED	<b>Color temperature (K):</b>	4000K
<b>Number:</b>	1		
<b>Watt:</b>	34W		
<b>Type:</b>	0		
<b>Class:</b>	A		

**LUMINAIRE**

<b>Watt:</b>	34W + 23W	<b>Delivered lumens output (lm):</b>	1977lm + 3089lm
		<b>CCT:</b>	4000K
		<b>CRI:</b>	80

**ACCESSORIES**



A.39 - Mechanical joint including 1 suspension cable AT09500



A.39 - Opal Diffuser in Polycarbonate - L=10000mm AT10000



A.39 - Undimmable Feeding kit including 2 suspension cables (3 poles) 2000mm (H) AT10400



A.39 - Opal Diffuser in Polycarbonate - L=1184mm AT10100



A.39 - Opal Diffuser in Polycarbonate - L=25000mm AT10800



A.39 - Opal Diffuser in Polycarbonate - L=50000mm AT10900



A.39 - End Cap (Kit 2x) - Silver AT09405