


# A.39 Suspension - Structural Module 1482mm - Direct + Indirect Emission - 3000K - Undimmable - White

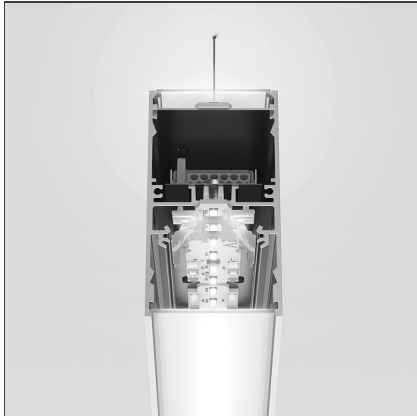

IP20   


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

## TECHNICAL DRAWINGS

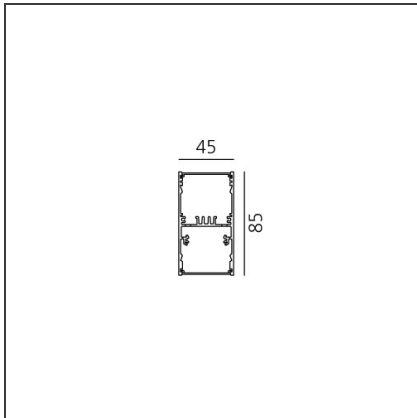

## FEATURES

<b>Article Code:</b>	AT22101	<b>Series:</b>	Indoor
<b>Colour:</b>	White		
<b>Installation:</b>	Ceiling		
<b>Environment:</b>	Indoor		

## DIMENSIONS

<b>Length:</b>	cm 148
<b>Width:</b>	cm 4.5
<b>Height:</b>	cm 8.5

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1		
<b>Watt:</b>	42W		
<b>Type:</b>	0		
<b>Class:</b>	A		
<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1		
<b>Watt:</b>	31W		
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Watt:</b>	42W + 31W	<b>Delivered lumens output (lm):</b>	2588lm + 3941lm
		<b>CCT:</b>	3000K
		<b>CRI:</b>	80

**ACCESSORIES**

NO  
IMAGE  
AVAILABLE

A.39 - Mechanical  
joint including 1  
suspension cable  
AT09500

NO  
IMAGE  
AVAILABLE

A.39 - End Cap (Kit  
2x) - White  
AT09401

NO  
IMAGE  
AVAILABLE

A.39 - Opal  
Diffuser in  
Polycarbonate -  
L=10000mm  
AT10000

NO  
IMAGE  
AVAILABLE

A.39 -  
Undimmable  
Feeding kit  
including 2  
suspension cables  
(3 poles) 2000mm  
(H)  
AT10400

NO  
IMAGE  
AVAILABLE

A.39 - Opal  
Diffuser in  
Polycarbonate -  
L=25000mm  
AT10800

NO  
IMAGE  
AVAILABLE

A.39 - Opal  
Diffuser in  
Polycarbonate -  
L=50000mm  
AT10900