


A.39 Suspension - Structural Module 2368mm - Direct + Indirect Emission - 4000K - DALI - Silver

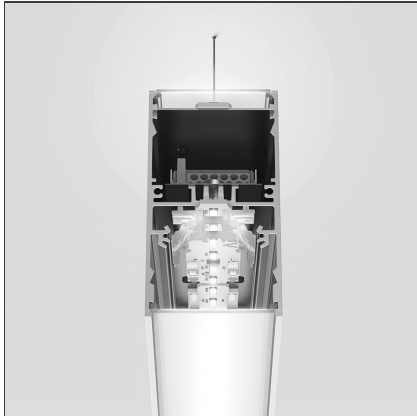

IP20  Dimmerable: 


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

TECHNICAL DRAWINGS

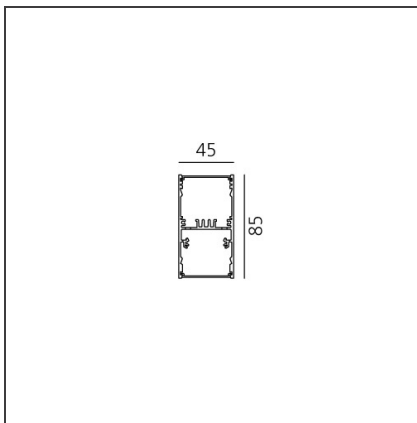

FEATURES

| | | | |
|----------------------|---------|----------------|--------|
| Article Code: | AT23205 | Series: | Indoor |
| Colour: | Silver | | |
| Installation: | Ceiling | | |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|----------------|--------|
| Length: | cm 237 |
| Width: | cm 4.5 |
| Height: | cm 8.5 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | | |
| Watt: | 50W | | |
| Type: | 0 | | |
| Class: | A | | |
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | | |
| Watt: | 66W | | |
| Type: | 0 | | |
| Class: | A | | |

LUMINAIRE

| | | | |
|--------------|-----------|--------------------------------------|-----------------|
| Watt: | 66W + 50W | Delivered lumens output (lm): | 3955lm + 6177lm |
| | | CCT: | 4000K |
| | | CRI: | 80 |
| | | Dimmable Typology: | Dali |

ACCESSORIES

NO
IMAGE
AVAILABLE

A.39 - Mechanical
joint including 1
suspension cable
AT09500

NO
IMAGE
AVAILABLE

A.39 - Opal
Diffuser in
Polycarbonate -
L=10000mm
AT10000

NO
IMAGE
AVAILABLE

A.39 - Dimmable
Feeding kit
including 2
suspension cables
(5 poles) 2000m
(H)
AT10500

NO
IMAGE
AVAILABLE

A.39 - Opal
Diffuser in
Polycarbonate -
L=2368mm
AT10200

NO
IMAGE
AVAILABLE

A.39 - Opal
Diffuser in
Polycarbonate -
L=25000mm
AT10800

NO
IMAGE
AVAILABLE

A.39 - Opal
Diffuser in
Polycarbonate -
L=50000mm
AT10900

NO
IMAGE
AVAILABLE

A.39 - End Cap (Kit
2x) - Silver
AT09405