

## A. Sharping Wired Gear Plates Sharping LED Direct Emission + Indirect - 1184mm 64W 36° 3000K



IP20  Dimmerable: 


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

Algoritmo Sharping is very flexible and it allows to combine in continuity Sharp light modules, with indirect and diffused LED lighting in warm white (3000K) and neutral white (4000K). Structural modules are in extruded aluminum, available in different lengths depending on the installation option, three finishes (white, black, silver or gloss anodized), two optic finishes (black and white) and three beams (20°, 36° and 52°).

### TECHNICAL DRAWINGS

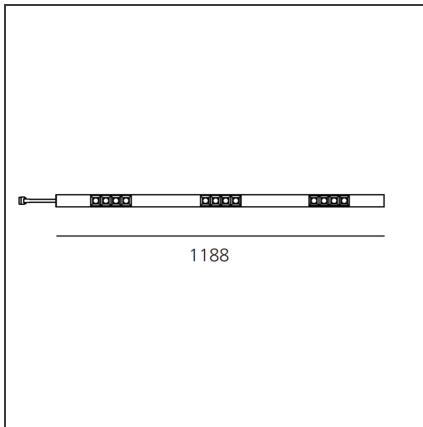

### FEATURES

|               |  |         |        |
|---------------|--|---------|--------|
| Article Code: | AE15100                                | Series: | Indoor |
| Colour:       | White                                  |         |        |
| Installation: | Recessed, Wall,<br>Suspension, Ceiling |         |        |
| Environment:  | Indoor                                 |         |        |

### DIMENSIONS

|         |        |
|---------|--------|
| Length: | cm 118 |
|---------|--------|

### INCLUDED SOURCES

|           |     |                        |                   |
|-----------|-----|------------------------|-------------------|
| Category: | LED | Color temperature (K): | 3000K             |
| Number:   | 1   | Color Tolerance:       | MacAdam 2SDCM     |
| Watt:     | 64W | Service Life:          | L90 (20K) 118000h |
| Type:     | 0   |                        |                   |
| Class:    | A   |                        |                   |

### LUMINAIRE

|       |     |                               |           |
|-------|-----|-------------------------------|-----------|
| Watt: | 64W | Delivered lumens output (lm): | 4789lm    |
|       |     | CCT:                          | 3000K     |
|       |     | Efficiency:                   | 74%       |
|       |     | Efficacy:                     | 74.83lm/W |
|       |     | CRI:                          | 90        |
|       |     | Dimmable Typology:            | Dali      |

### Notes

MV integrated through-cable. Protection screen for indirect LED wired plate included.