

# Aria Micro - 2,5W 3000K - IP65 - Silver




IP65

## DESCRIPTION

Light fixture with high-performance LED light sources. Wall or ceiling installation. Composed by: frame, body, asymmetrical reflector, fixing springs or housing. Body in injection mould of aluminium. Frame in aluminium. Body and frame are painted with outdoor treatment three stages: nanotechnologies, antioxidant primer, polyester paint. Metalized polycarbonate reflector. Silicone gasket. Protection screen in tempered glass, 3mm-thick. Housing in bend metal. Electrical connection to the ballast by means of a cable with appropriate terminal board supplied with the fixture. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K IP Rating IP65 or IP40. Insulation class III. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

## TECHNICAL DRAWINGS

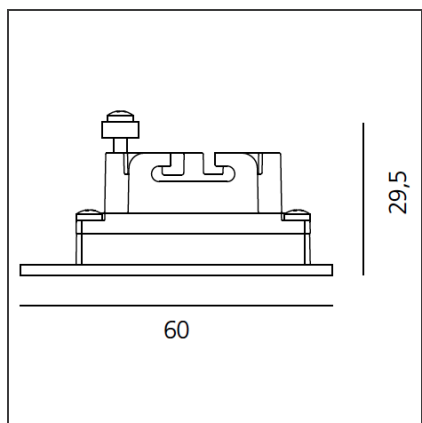

## FEATURES

<b>Article Code:</b>	NL31019VTK002	<b>Material:</b>	Aluminum, polycarbonate, tempered glass
<b>Colour:</b>	Silver	<b>Series:</b>	Outdoor
<b>Installation:</b>	Wall, Ceiling		
<b>Environment:</b>	Outdoor		

## DIMENSIONS

<b>Length:</b>	cm 6	<b>Cutout shape:</b>	Squared
<b>Height:</b>	cm 6		
<b>Weight:</b>	kg 0.6		
<b>Recessed depth:</b>	cm 3		

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 4SDCM
<b>Watt:</b>	2,5W	<b>CRI:</b>	=80(min.)
<b>Delivered lumens output (lm):</b>	165lm	<b>Efficacy:</b>	72lm/W
<b>Type:</b>	0	<b>Service Life:</b>	L70(10K)>60500h
<b>Class:</b>	A		

## LUMINAIRE

<b>Watt:</b>	2,5W	<b>Delivered lumens output (lm):</b>	57lm
		<b>CCT:</b>	3000K
		<b>Efficiency:</b>	100%
		<b>Efficacy:</b>	21.11lm/W
		<b>CRI:</b>	80

ACCESSORIES



ALIMENT. 8,4W  
350mA (indip.)  
NL19032



ALIMENT. 20W  
700mA (indip.)  
NL19036



Cassaforma Aria  
Micro  
NL31020H0



ALIMENT. 9,8W  
700mA (indip.)  
NL19035