

Cariddi 40 - 36° 3000K



IP65 


DESIGN BY

Ernesto Gismondi

DESCRIPTION

Monochromatic LED projector. Floor, wall, ceiling, eaves installation. Consists of an adjustable lighting unit and terminal board. Rotation on the base +/-180°, body tilting +/-130. Positioning is maintained by means of locking dowels. The base and the lighting unit are connected by a H05RN-F cable. EN AB47100 aluminium head and terminal board, EN AW6060 aluminium body, silicone gaskets. Electronic ballast integrated in the body. Silicone-sealed silk-screened tempered glass. Wiring to be performed inside the terminal board by piercing an IP65 grommet suitable for 8-12mm diameter cables. LED COB with PMMA lens and anodized aluminium reflector in 2 different beam versions. Available in 3 different powers. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the light fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP65 Insulation class I

TECHNICAL DRAWINGS

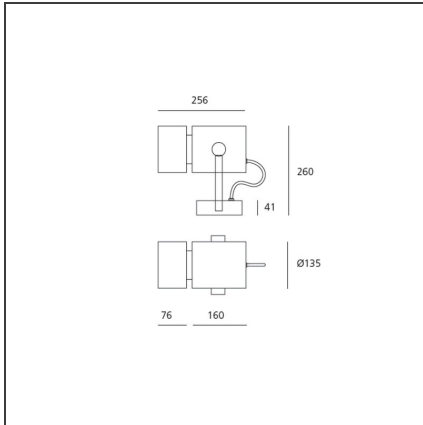

FEATURES

Article Code:	T418740W00	Material:	Aluminum, tempered glass, methacrylate
Colour:	Grey antracite	Series:	Outdoor
Installation:	Floor, Wall, Ceiling		

DIMENSIONS

Length:	cm 25.6	Impact Resistance:	IK07
Width:	cm 16.2	Glow Wire Test:	750
Height:	cm 26		

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	CRI:	80
Watt:	41W		
Type:	0		
Class:	A		

LUMINAIRE

Watt:	41W	Delivered lumens output (lm):	2405lm
Voltage:	220V-240 V	CCT:	3000K
		Efficiency:	100%
		Efficacy:	58.66lm/W
		CRI:	80