




Cefiso Pole - 3000K - Grey antracite



IP65   


DESIGN BY

Alessandro Pedretti

DESCRIPTION

Light fixture with adjustable direct emission, with high-performance LED light sources. Pole installation. Available in two finishes: light grey painted and anthracite grey painted. Composed by lighting unit and pole support. Fixing is maintained by means of locking dowels. The pole, not supplied, must have a \varnothing 60mm and h90mm shank for the correct fixing of the headpole. The pole height must be 4m from the ground to provide a correct surface lighting. At these conditions, the poles can be installed at a distance of 15m, suitable for lighting a 4m carriageway in compliance with S3 class for cycle tracks. Body in EN AB44100 aluminium, pole support in galvanized iron, silicone gaskets. Electronic ballast integrated in the body. The light fixture is protected from impulse overvoltage up to 4KV both in differential and common mode. Silicone-sealed silk-screened tempered glass. IP67 connector for electric connection to the mains, it can be housed in the pole compartment and is suitable for cables with a diameter of 5-13.5mm. LED circuits with PMMA lenses with road emission beam. White monochromatic LEDs available in 3 colour temperatures: Warm = 3000K Neutral = 4000K Cold = 6000K Screws in AISI 316 stainless steel. All parts in die-cast aluminium and galvanized iron are painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Technical features of light fixtures in compliance with EN60598-1 and part 2-5. IP Rating IP65. Insulation class II.

TECHNICAL DRAWINGS

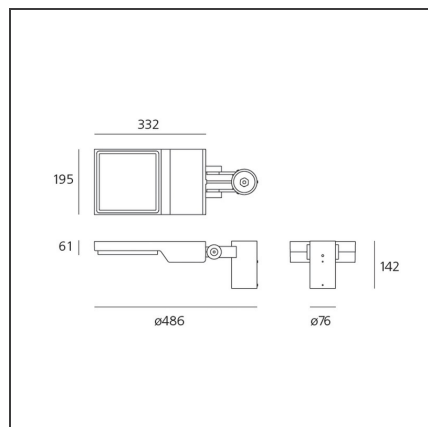

FEATURES

Article Code:	T418200W10	Material:	Aluminum, tempered glass, methacrylate, galvanized iron
Colour:	Grey antracite	Series:	Outdoor
Installation:	Pole		

DIMENSIONS

Length:	cm 48.5	Impact Resistance:	IK10
Width:	cm 19.5		
Max Extension Height:	cm 400		

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	CRI:	80
Watt:	41W		
Type:	0		
Class:	A		

LUMINAIRE

Watt:	41W	Delivered lumens output (lm):	1848lm
Voltage:	220V-240V	CCT:	3000K
		Efficiency:	100%
		Efficacy:	46.20lm/W
		CRI:	80