

# Chocolate Suspension LED - 63 W 3000 K Dimmable Dali - Moka



IP20 Dimmerable:


## DESIGN BY

a.g Licht

## DESCRIPTION

Single pendant light with direct-indirect lighting using Led and 2x28 W and 2x54 W T16 fluorescent lamps. Aluminium body. 2 colours: moka and white. Optics made of transparent polycarbonate fitted with a prismoptic diffuser. Electronic control gear, or Dali-SwitchDim dimmabl electronic control gear. Emergency lighting on request. Polycarbonate dust protection cover. Quick adjustment steel suspension cables. Complies with standard EN60598-1 and other specific standards.

## TECHNICAL DRAWINGS

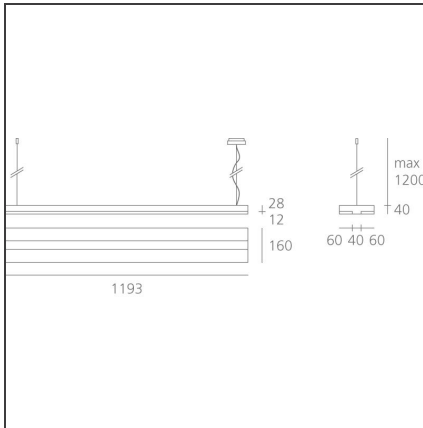

## FEATURES

<b>Article Code:</b>	M113611	<b>Material:</b>	Painted Aluminum
<b>Colour:</b>	Moka	<b>Series:</b>	Indoor
<b>Installation:</b>	Suspension	<b>Area contract:</b>	Hospitality, Office

## DIMENSIONS

<b>Length:</b>	cm 114	<b>Glow Wire Test:</b>	850
<b>Width:</b>	cm 16		
<b>Height:</b>	cm 4		
<b>Weight:</b>	kg 4.6		
<b>Max Height from ceiling:</b>	cm 120		

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 4SDCM
<b>Watt:</b>	55W	<b>CRI:</b>	=80 (min.)
<b>Delivered lumens output (lm):</b>	8230lm	<b>Efficacy:</b>	150lm/W
<b>Type:</b>	0	<b>Service Life:</b>	L70(6K)>50.000h
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	Electronic Dimmable Dali Integrated	<b>Delivered lumens output (lm):</b>	3868lm
<b>Watt:</b>	63.0W	<b>CCT:</b>	3000K
<b>Voltage:</b>	220V-240V	<b>Efficiency:</b>	100%
		<b>Efficacy:</b>	61.40lm/W
		<b>CRI:</b>	80
		<b>Dimmable Typology:</b>	Dali