

Chocolate Wall LED - L 1145 - 31 W 3000 K Undimmable - White



IP20  


DESIGN BY

a.g Licht

DESCRIPTION

Wall lamp with direct-indirect lighting using LED technology. Aluminum body. 2 colour options: mocha and white. Optics made of transparent polycarbonate + a PRISMOPTIC diffuser. Light distribution: 37% direct and 63% indirect. Polycarbonate dust protection cover. Electronic control gear. Complies with standard EN60598-1 and other specific standards.

TECHNICAL DRAWINGS

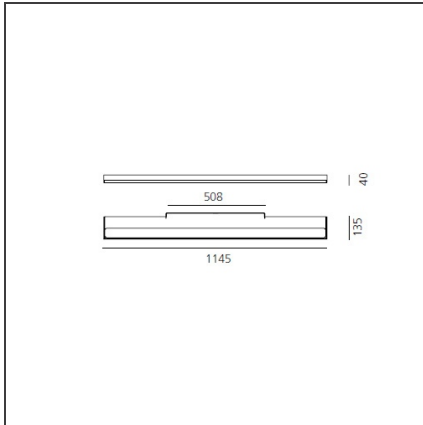

FEATURES

| | | | |
|----------------------|---------|-----------------------|---------------------|
| Article Code: | M112620 | Material: | Painted Aluminium |
| Colour: | White | Series: | Indoor |
| Installation: | Wall | Area contract: | Hospitality, Office |

DIMENSIONS

| | | | |
|----------------|----------|------------------------|-----|
| Length: | cm 114.5 | Glow Wire Test: | 850 |
| Width: | cm 13.5 | | |
| Height: | cm 4 | | |
| Weight: | kg 3.7 | | |

INCLUDED SOURCES

| | | | |
|--------------------------------------|---------|-------------------------------|----------------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | Color Tolerance: | MacAdam 4SDCM |
| Watt: | 28W | CRI: | =80(min.) |
| Delivered lumens output (lm): | 41410lm | Efficacy: | 148lm/W |
| Type: | 0 | Service Life: | L70(6K)>50000h |
| Class: | A | | |

LUMINAIRE

| | | | |
|----------------------|-----------|--------------------------------------|-----------|
| Power Supply: | on/off | Delivered lumens output (lm): | 2262lm |
| Watt: | 31.0W | CCT: | 3000K |
| Voltage: | 220V-240V | Efficiency: | 100% |
| | | Efficacy: | 72.97lm/W |
| | | CRI: | 80 |