


Effetto Round 4 narrow beams Rust

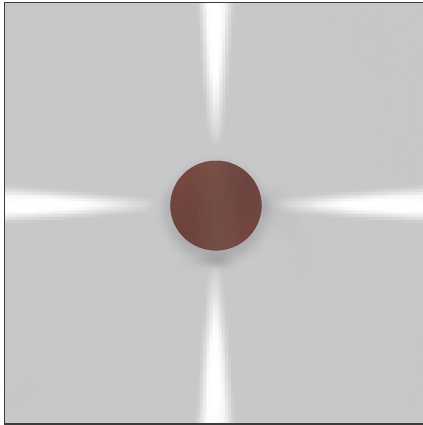

IP65    

DESIGN BY

Ernesto Gismondi

DESCRIPTION

Light fixture with 2 light beams using monochromatic LED light sources characterized by warm colour temperature (3000K) together with light-diffusing lenses which optimize the optical performance of the beams and establish their width. Designed to create geometric lights of scenic effect, it has 2 narrow beams of 15°. Wall installation. Composed by lighting cap unit and terminal board fixed together by means of locking dowels. Cap in die-cast EN AB-47100 aluminium. Terminal board in reinforced polymer. Watertight gasket in silicone rubber. Locking dowels used outside the fixture in AISI 316 stainless steel. PMMA lenses siliconed flush with the cap to obtain the beam angle opening.

FEATURES

Article Code:	T42104NW10	Material:	Aluminum, composite
Colour:	Rust		technopolymer, methacrylate
Installation:	Wall	Series:	Outdoor
Environment:	Outdoor	Area contract:	Urban, Outdoor, Residential
		Emission:	Indirect

DIMENSIONS

Width:	cm 14	Impact Resistance:	IK10
		Glow Wire Test:	650

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	Color Tolerance:	4SDCM
Watt:	11W	CRI:	80 typ
Delivered lumens output (lm):	714lm	Efficacy:	85lm/W
Type:	0	Service Life:	L70(14K)>81600
Class:	A		


LUMINAIRE

Power Supply:	Electronic Integrated	Delivered lumens output (lm):	76,1lm
Watt:	11W	CCT:	3000K
Voltage:	220V-240V	Efficiency:	100%
		Efficacy:	9.31lm/W
		CRI:	80

Notes

Wiring to be carried out inside the terminal board by piercing an IP65 membrane grommet suitable for cables with a diameter of 6-13 mm. Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Effective power 5,4W.

LIGHT DISTRIBUTION

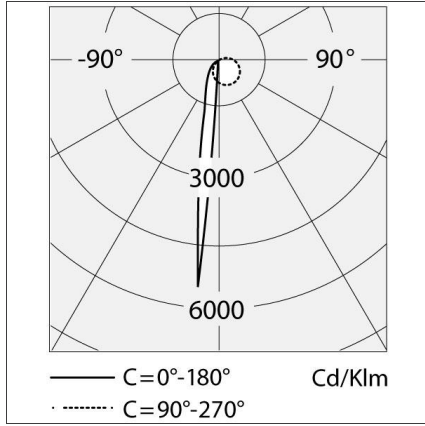

We reserve the right to change our product specifications.
Please visit www.artemide.com for the latest product information

March 2019