


Ego 150 Flat downlight Round 38° 3000K

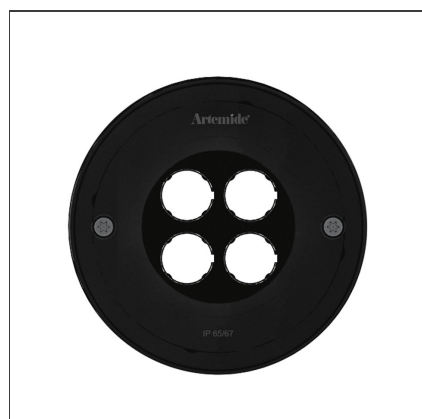

IP 65/67


DESIGN BY

Studio Artemide

DESCRIPTION

Light fixture with high-performance LED light sources. Ceiling installation. Two different housing depths. Round and square version in five sizes. Consists of body, frame, black silkscreened tempered glass, fixing springs. Body in EN AB44100 aluminium, silicone gaskets. Frame in aluminium or stainless steel AISI 316. Black silkscreened tempered glass, 8mm-thick. Fixing springs in harmonic iron. Power connection to the mains by means of a H05RN-r cabl and IP68 electrical terminal board, supplied with the fixture. Glass surface temperature lower than 40°C. Fixed or adjustable optics. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 2 colour temperatures Warm = 3000K Neutral = 4000K Painted die-cast aluminium with 3-stage outdoortreatment: nanotechnologies, anti-oxidant primer, polyester paint. Technical features of light fixtures in compliance with EN60598-1 and part 2-13. IP Rating IP65. Insulation class III. Installation must be carried out by specialized personnel. Carefully follow the instructions.

TECHNICAL DRAWINGS

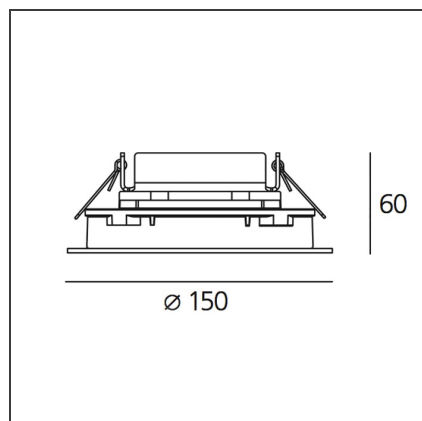

FEATURES

| | | | |
|---------------|--------------|---------|---------|
| Article Code: | T42017WFLW00 | Series: | Outdoor |
| Installation: | Recessed | | |

DIMENSIONS

| | | | |
|-----------------|------|--------------------|---------|
| Recessed depth: | cm 6 | Cutout diameter: | cm 13.5 |
| | | Cutout shape: | Rounded |
| | | Impact Resistance: | IK10 |

INCLUDED SOURCES

| | | | |
|-------------------------------|-------|------------------------|-------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | | |
| Watt: | 6W | | |
| Delivered lumens output (lm): | 366lm | | |
| Type: | 0 | | |
| Class: | A | | |

LUMINAIRE

| | | | |
|-------|------|-------------------------------|-----------|
| Watt: | 6.3W | Delivered lumens output (lm): | 321lm |
| | | CCT: | 3000K |
| | | Efficiency: | 100% |
| | | Efficacy: | 50.95lm/W |
| | | CRI: | 80 |

Notes

Flood opticWide luminous flow suitable for lighting large areas.

ACCESSORIES

NO
IMAGE
AVAILABLE

ALIMENT. 13,5W
500mA IP67
NL19046

NO
IMAGE
AVAILABLE

ALIMENT. 20W
500mA IP67
NL19047