


# Ego 220 Flat glass downlight Square 38° 3000K

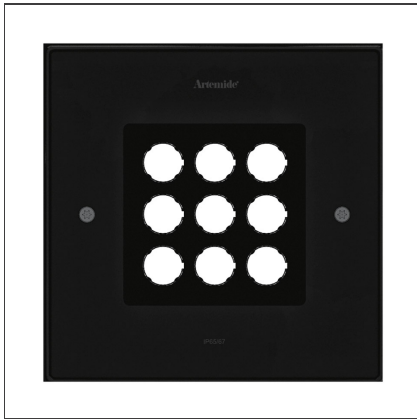

IP 65/67


## DESIGN BY

Studio Artemide

## DESCRIPTION

Light fixture with high-performance LED light sources. Ceiling installation. Two different housing depths. Round and square version in five sizes. Consists of body, frame, black silkscreened tempered glass, fixing springs. Body in EN AB44100 aluminium, silicone gaskets. Frame in aluminium or stainless steel AISI 316. Black silkscreened tempered glass, 8mm-thick. Fixing springs in harmonic iron. Power connection to the mains by means of a H05RN-r cabl and IP68 electrical terminal board, supplied with the fixture. Glass surface temperature lower than 40°C. Fixed or adjustable optics. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 2 colour temperatures Warm = 3000K Neutral = 4000K Painted die-cast aluminium with 3-stage outdoortreatment: nanotechnologies, anti-oxidant primer, polyester paint. Technical features of light fixtures in compliance with EN60598-1 and part 2-13. IP Rating IP65. Insulation class III. Installation must be carried out by specialized personnel. Carefully follow the instructions.

## TECHNICAL DRAWINGS

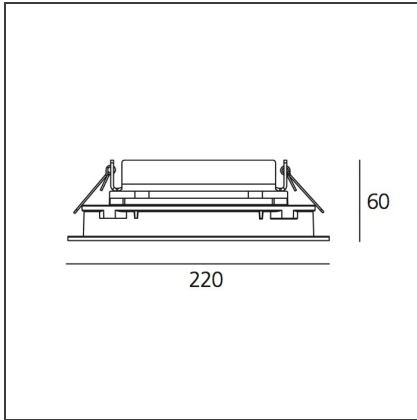

## FEATURES

<b>Article Code:</b>	T42020WFLW00	<b>Series:</b>	Outdoor
<b>Installation:</b>	Recessed		

## DIMENSIONS

<b>Base Length:</b>	cm 22	<b>Cutout shape:</b>	Squared
<b>Base Width:</b>	cm 22	<b>Impact Resistance:</b>	IK10
<b>Recessed depth:</b>	cm 6		

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	4SDCM
<b>Watt:</b>	14W	<b>CRI:</b>	80 Typ
<b>Delivered lumens output (lm):</b>	884lm	<b>Efficacy:</b>	63lm/W
<b>Type:</b>	0	<b>Service Life:</b>	L70(10K)>60.500
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	alimentazione elettronica fornita a parte	<b>Delivered lumens output (lm):</b>	794lm
<b>Watt:</b>	14W	<b>CCT:</b>	3000K
		<b>Efficiency:</b>	100%
		<b>Efficacy:</b>	56.71lm/W
		<b>CRI:</b>	80

## Notes

Flood opticWide luminous flow suitable for lighting large areas.

**ACCESSORIES**

---



ALIMENT. 20W  
500mA IP67  
NL19047