


Falange 18 spot 10° Gray/white



IP65

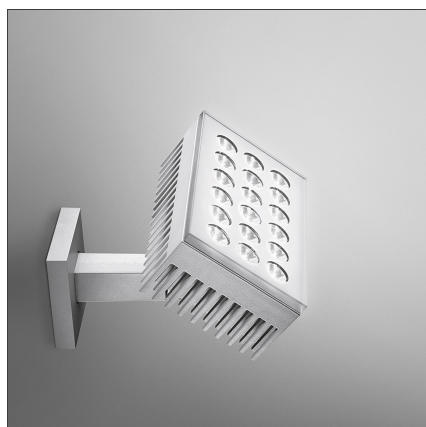


DESIGN BY

Wilmotte & Industries

DESCRIPTION

Adjustable light fixture with direct emission, with high-performance LED light sources. Ground, wall, eaves installation. 2 sizes: 134 x 134, 238 x 134 mm. Composed by adjustable lighting unit and support (housing the wiring). Rotation on the base +/-180°, body tilt +/-100° by means of a graduated metal ring allowing an accurate adjustment. Positioning is maintained by means of locking dowels. Body and support in EN AB44100 aluminium, silicone gaskets. Electronic ballast integrated in the body. Silkscreened tempered glass siliconed to a secondary frame. Wiring to be carried out by means of plug IP 68.

TECHNICAL DRAWINGS

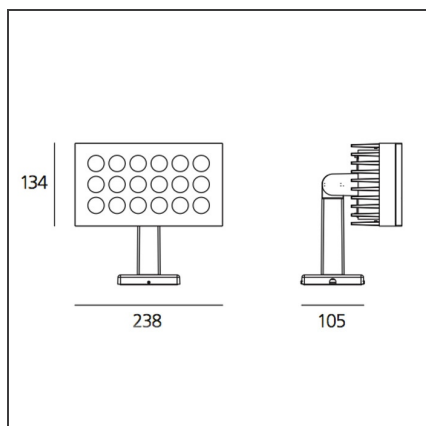

FEATURES

Article Code:	NL3000110K002	Material:	Painted aluminum, tempered glass
Colour:	Gray/white	Series:	Outdoor
Installation:	Floor, Wall, Ceiling		

DIMENSIONS

Length:	cm 23.8
Width:	cm 10.5
Height:	cm 21.4

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	Color Tolerance:	MacAdam 4SDCM
Watt:	44W	CRI:	80
Delivered lumens output (lm):	2182lm	Efficacy:	55lm/W
Type:	0	Service Life:	L70(10K) > 60500h
Class:	A		

LUMINAIRE

Watt:	44W	Delivered lumens output (lm):	1917lm
Voltage:	220-240 Vac	CCT:	3000K
		CRI:	80