


# Falange 18 wall washer EL Anthracite gray



IP65

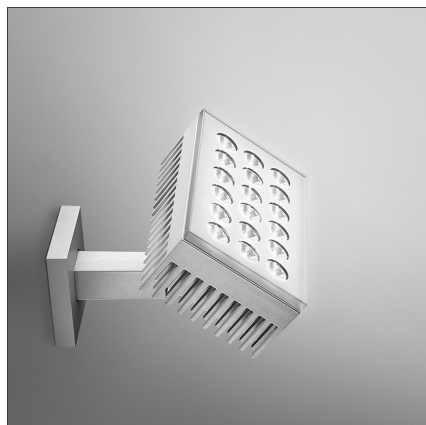


## DESIGN BY

Wilmotte &amp; Industries

## DESCRIPTION

Adjustable light fixture with direct emission, with high-performance LED light sources. Ground, wall, eaves installation. 2 sizes: 134 x 134, 238 x 134 mm. Composed by adjustable lighting unit and support (housing the wiring). Rotation on the base +/-180°, body tilt +/-100° by means of a graduated metal ring allowing an accurate adjustment. Positioning is maintained by means of locking dowels. Body and support in EN AB44100 aluminium, silicone gaskets. Electronic ballast integrated in the body. Silkscreened tempered glass siliconed to a secondary frame. Wiring to be carried out by means of plug IP 68.

## TECHNICAL DRAWINGS

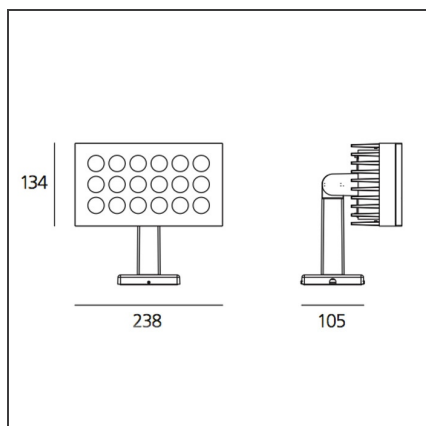

## FEATURES

<b>Article Code:</b>	NL30001ELK005	<b>Material:</b>	Painted aluminum, tempered glass
<b>Colour:</b>	Anthracite gray	<b>Series:</b>	Outdoor
<b>Installation:</b>	Floor, Wall, Ceiling		

## DIMENSIONS

<b>Length:</b>	cm 23.8
<b>Width:</b>	cm 10.5
<b>Height:</b>	cm 21.4

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 4SDCM
<b>Watt:</b>	44W	<b>CRI:</b>	80
<b>Delivered lumens output (lm):</b>	2182lm	<b>Efficacy:</b>	55lm/W
<b>Type:</b>	0	<b>Service Life:</b>	L70(10K) > 60500h
<b>Class:</b>	A		

## LUMINAIRE

<b>Watt:</b>	44W	<b>Delivered lumens output (lm):</b>	1661lm
<b>Voltage:</b>	220-240 Vac	<b>CCT:</b>	3000K
		<b>CRI:</b>	80