

Float Circolare Ceiling



IP20     


DESIGN BY

James Irvine

DESCRIPTION

Structure in painted aluminium, lower diffuser in opaline methacrylate, upper diffuser in transparent polycarbonate.

TECHNICAL DRAWINGS

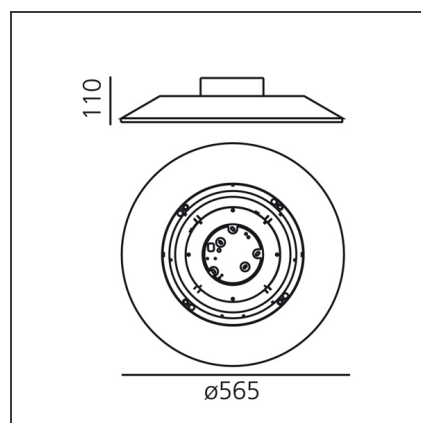

FEATURES

Article Code:	- - -	Material:	Aluminium, methacrylate, polycarbonate
Colour:	White	Series:	Scenarios
Installation:	Suspension, Ceiling	Area contract:	Hospitality, Office
Environment:	Indoor	Emission:	Direct/indirect

DIMENSIONS

Height:	cm 11	Impact Resistance:	N/D
		Glow Wire Test:	650°C

INCLUDED SOURCES

Category:	FLUO	Color Rendering:	1b
Number:	1	Color temperature (K):	3000K
Watt:	55W		
Lbs:	T16-Round		
Socket:	2GX13		

LUMINAIRE

Power Supply:	Electronic Integrated	Delivered lumens output (lm):	4200lm
Watt:	55W	CCT:	3000K
Voltage:	220V-240V		

Notes

Lamp included. Available in circular or linear versions. Application of a coloured filter, blue or topaz, to the indirect light emission (Float circolare and Float lineare monotubo only).

ACCESSORIES



FLOAT CIRCOLARE
FILTRO TOP
0369040A



FLOAT CIRCOLARE
FILTRO BLU
0369030A