




## Ilio Glossy black 2700K - App Compatible



IP20    Dimmerable: 


### DESIGN BY

Ernesto Gismondi

### DESCRIPTION

With simple geometry, stripped of all formal digressions and reduced to its basics, Ilio draws attention through saturated colour, available in 7 variations. A mono-material aluminium cylinder supports a 39W LED optical engine on the top, which produces high-efficiency diffused indirect light emissions. With a flow of more than 2700 lumen and an 80% yield, it ensures the general lighting of a room. With light regulator configured to controlled socket, dimmer microswitch.

### TECHNICAL DRAWINGS

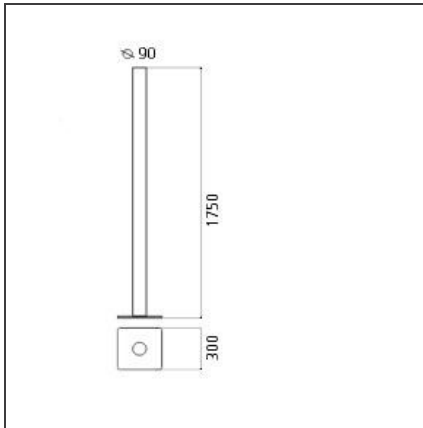

### FEATURES

<b>Article Code:</b>	1640W30APP	<b>Material:</b>	Aluminium, steel
<b>Colour:</b>	Glossy black	<b>Series:</b>	Design
<b>Installation:</b>	Floor	<b>Area contract:</b>	Hospitality, null, Residential
<b>Environment:</b>	Indoor	<b>Emission:</b>	Indirect

### DIMENSIONS

<b>Height:</b>	cm 175	<b>Impact Resistance:</b>	N.D.
<b>Base Length:</b>	cm 30	<b>Glow Wire Test:</b>	750
<b>Base Width:</b>	cm 30		

### INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	2700K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 2SDCM
<b>Watt:</b>	36.36W	<b>CRI:</b>	90
<b>Delivered lumens output (lm):</b>	3646lm	<b>Efficacy:</b>	100lm/W
<b>Type:</b>	0	<b>Service Life:</b>	50000-L70
<b>Class:</b>	A		

### LUMINAIRE

<b>Watt:</b>	45W	<b>Delivered lumens output (lm):</b>	3332lm
<b>Voltage:</b>	220-240V	<b>CCT:</b>	2700K
		<b>Efficiency:</b>	87%
		<b>Efficacy:</b>	74.04lm/W
		<b>CRI:</b>	90
		<b>Dimmer Typology:</b>	Microswitch Dimmer