

Indicta 4000K



IP65   


DESIGN BY

Ernesto Gismondi

DESCRIPTION

Light fixture with direct emission, with high-performance LED light sources. ø60mm pole installation with ø35x120mm shank (not supplied). Anthracite grey finish. Composed by optical housing and support for pole installation. Optical housing in extruded EN-AW-6060 aluminium, chromate treated and painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. UV resistant diffuser in shock resistant polycarbonate. High-efficiency asymmetrical optics in metalized polycarbonate. Optical housing support in high-resistance mass-coloured reinforced polymers.

TECHNICAL DRAWINGS

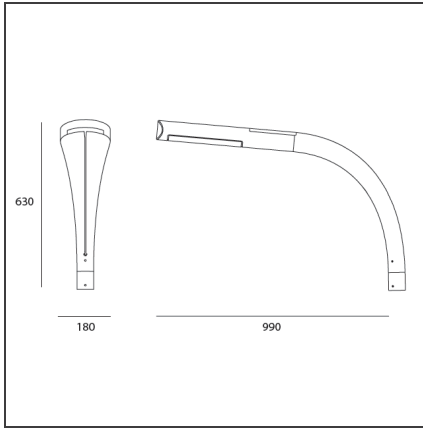

FEATURES

Article Code:	T084800	Material:	Aluminum, polycarbonate
Installation:	Pole, Floor	Series:	Outdoor
		Area contract:	null

DIMENSIONS

Length:	cm 99	Glow Wire Test:	650
Width:	cm 18		
Height:	cm 363		

INCLUDED SOURCES

Category:	LED	Color temperature (K):	4000K
Number:	1	CRI:	80
Watt:	24W		
Type:	0		
Class:	A		

LUMINAIRE

Watt:	24W	Delivered lumens output (lm):	1341lm
Voltage:	220V-240V	CCT:	4000K
		Efficiency:	82%
		Efficacy:	58lm/W
		CRI:	80