

# JavaLED\_2x26W\_12°\_3000K\_TRIMLESS



IP20  


## DESIGN BY

Ernesto Gismondi

## DESCRIPTION

Trim or trimless adjustable downlights using LED. 3 models: square with 1 lamp, rectangular with 2, 3 and 4 lamps. Each spotlight may be adjusted individually with a tilt angle ranging from -20° to +70°, and rotation of up to 355°.

## TECHNICAL DRAWINGS

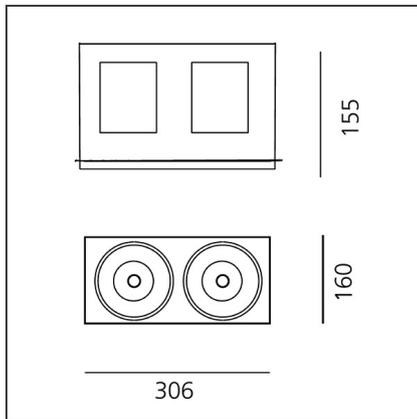

## FEATURES

<b>Article Code:</b>	M2876W01	<b>Material:</b>	Acciaio
<b>Colour:</b>	White	<b>Series:</b>	Indoor
<b>Installation:</b>	Recessed		

## DIMENSIONS

<b>Length:</b>	cm 30.6	<b>Cutout Width:</b>	cm 16
<b>Width:</b>	cm 16	<b>Cutout length:</b>	cm 30.6
<b>Height:</b>	cm 15.5	<b>Cutout shape:</b>	Squared
<b>Recessed depth:</b>	cm 15.5	<b>Glow Wire Test:</b>	960

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	2	<b>Color Tolerance:</b>	MacAdam 3SDCM
<b>Watt:</b>	26W	<b>CRI:</b>	=80(min.)
<b>Delivered lumens output (lm):</b>	2303 lm	<b>Efficacy:</b>	90lm/W
<b>Type:</b>	0	<b>Service Life:</b>	L70(6K)>50000h

## LUMINAIRE

<b>Power Supply:</b>	Electronic remote	<b>Delivered lumens output (lm):</b>	3966lm
<b>Watt:</b>	52.0W	<b>CCT:</b>	3000K
		<b>Efficiency:</b>	100%
		<b>Efficacy:</b>	76.26lm/W

## Notes

Independent power supply to be ordered separately.

**ACCESSORIES**

NO  
IMAGE  
AVAILABLE

Driver cc 32W  
700mA DALI  
dimmable  
M079200

NO  
IMAGE  
AVAILABLE

DRIVER cc 32W  
700mA 220-240  
103 67 21 1max 1-  
10V, push  
M079300

NO  
IMAGE  
AVAILABLE

Drive cc max 32W  
700mA 220-  
240Vac - on/off -  
103x67x21mm  
(LxWxH)  
M079201