


LineaLed 10W RGB

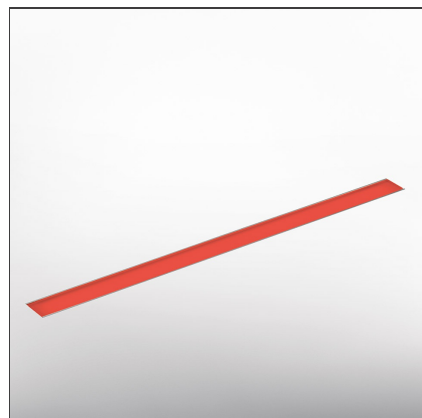

IP65/67  


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

Light fixture with high-performance LED light sources. Walk-over and drive-over recessed floor installation. Walk over and drive over approved up to 5000Kg. RGB light. Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection. Floor recessing box in steel. Body in extruded EN AW6060 T5 aluminum. End caps in injection-moulded polycarbonate with silicone gasket. 8mm-thick opal non-slip tempered glass. Glass surface temperature lower than 35°. Recessing box for laying in AISI 304 steel, with end caps and accessories for series connection (to be ordered separately). Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture. Painted profile with 2-stage outdoor treatment: primer, outdoor paint. RGB version with Full Colour RGB LEDs. IP Rating IP65-IP67. Insulation class III. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

TECHNICAL DRAWINGS

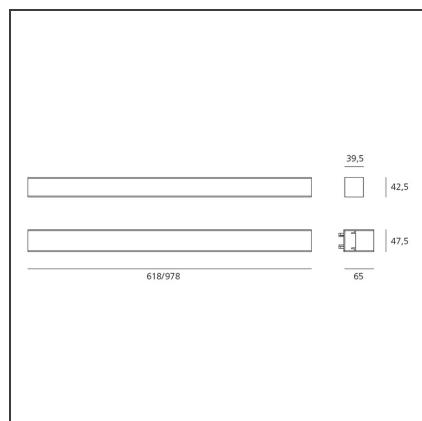

FEATURES

Article Code:	NL76480	Material:	Aluminum.
Installation:	Recessed	Series:	Outdoor
		Area contract:	Urban

DIMENSIONS

Length:	cm 61.8
Width:	cm 4.7
Height:	cm 9

INCLUDED SOURCES

Category:	LED	Color temperature (K):	RGB
Number:	1	Voltage:	24 Vdc
Watt:	10W		
Type:	0		
Class:	A		

LUMINAIRE

Watt:	10W
Voltage:	24Vdc PWM

Notes

Remote Led Driver supplied separately.

Maximum n°12 of fixtures per LED driver.

ACCESSORIES

 Housing L=982mm
NL76700

 Female power
connector for
discontinuos
connection
NL19023

 CAVO
COLLEGAMENTO
TASTIERA
ESTERNA
NL7833

 DRIVER LED NLX 2-
100 RGB 100W
IP65
NL84100

 CONNETTORE
ALIMENTAZIONE +
TAPPO
NL19052


 DRIVER LED NLX 2-
150 Max150W
IP65
NL77270

 DSC30 interfaccia
USB - DMX stand
alone microled
NL19030

 Housing L=622mm
NL76720

 Housing end cap
(pair) - 46,5 x 62,5
x 1,5mm
NL76750

 Male power
connector for
discontinuos
connection
NL19021

 DRIVER LED NLX 2-
70 IP65
NL81260

 Alimentatore
9V/350mA con
connettore mini
USB per DSC30
NL19031

 LINEALED STAFFA
GIUNZIONE
C/CASSA
NL75810