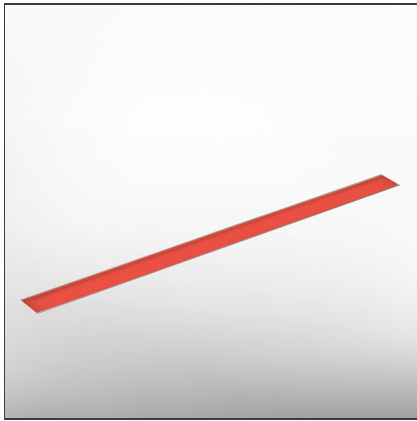



LineaLed 16W RGB

IP65/67  **DESIGN BY**

Carlotta de Bevilacqua

DESCRIPTION

Light fixture with high-performance LED light sources.
 Walk-over and drive-over recessed floor installation.
 Walk over and drive over approved up to 5000Kg.
 RGB light.
 Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection.
 Floor recessing box in steel.
 Body in extruded EN AW6060 T5 aluminium.
 End caps in injection-moulded polycarbonate with silicone gasket.
 8mm-thick opal non-slip tempered glass.
 Glass surface temperature lower than 35°.
 Recessing box for laying in AISI 304 steel, with end caps and accessories for series connection (to be ordered separately).
 Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture.
 Painted profile with 2-stage outdoor treatment: primer, outdoor paint.
 RGB version with Full Colour RGB LEDs.
 IP Rating IP65-IP67.
 Insulation class III.
 Technical features of light fixtures in compliance with EN60598-1.
 Installation must be carried out by specialized personnel. Carefully follow the instructions.

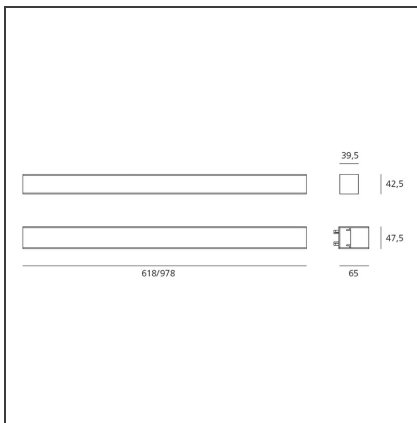TECHNICAL DRAWINGS**FEATURES**

Article Code:	NL76490	Material:	Aluminum
Installation:	Recessed	Series:	Outdoor
		Area contract:	Urban

DIMENSIONS

Length:	cm 97.8
Width:	cm 4.7
Height:	cm 9

INCLUDED SOURCES

Category:	LED	Color temperature (K):	RGB
Number:	1	Voltage:	24 Vdc
Watt:	16W		
Type:	0		
Class:	A		


LUMINAIRE

Power Supply:	Driver RGB
Watt:	16W
Voltage:	24Vdc PWM


Notes

Remote Led Driver supplied separately.
 Maximum n°7 of fixtures per LED driver.


ACCESSORIES



Female power connector for discontinuous connection
NL19023




Housing L=982mm
NL76700



CAVO COLLEGAMENTO TASTIERA ESTERNA
NL7833



DRIVER LED NLX 2-100 RGB 100W IP65
NL84100



CONNETTORE ALIMENTAZIONE + TAPPO
NL19052



DRIVER LED NLX 2-150 Max150W IP65
NL77270



DSC30 interfaccia USB - DMX stand alone microled
NL19030



Housing end cap (pair) - 46,5 x 62,5 x 1,5mm
NL76750



Male power connector for discontinuous connection
NL19021



Housing L=622mm
NL76720



DRIVER LED NLX 2-70 IP65
NL81260



Alimentatore 9V/350mA con connettore mini USB per DSC30
NL19031



LINEALED STAFFA GIUNZIONE C/CASSA
NL75810