

# LineaLed 5W 3000K



IP65/67  


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

Light fixture with high-performance LED light sources.  
Walk-over and drive-over recessed floor installation.  
Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection.  
Floor recessing box in steel.  
Technical features of light fixtures in compliance with EN60598-1.  
Installation must be carried out by specialized personnel. Carefully follow the instructions.

## TECHNICAL DRAWINGS

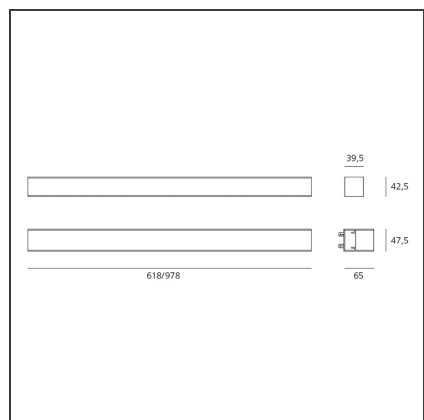

## FEATURES

<b>Article Code:</b>	NL7398VSK0	<b>Series:</b>	Outdoor
<b>Installation:</b>	Recessed	<b>Area contract:</b>	Urban

## DIMENSIONS

<b>Length:</b>	cm 61.8
<b>Width:</b>	cm 4.7
<b>Height:</b>	cm 9

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000 K
<b>Number:</b>	1	<b>Voltage:</b>	24 Vdc
<b>Watt:</b>	5 W		
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	Electronic remote ballast	<b>Delivered lumens output (lm):</b>	115lm
<b>Watt:</b>	5W	<b>CCT:</b>	3000K
<b>Voltage:</b>	24Vdc	<b>CRI:</b>	75

## Notes

Electrical connection to the ballast by means of 100cm-long two-pole cable H05RN-F, with IP67 quick-release terminal block which is supplied with the fixture and can be housed in the recessing box.

LineaLed 62: Connect a maximum number of 16 fixtures in a continuous line

**ACCESSORIES**

 Housing L=622mm  
NL76720

 Housing end cap  
(pair) - 46,5 x 62,5  
x 1,5mm  
NL76750

 Female power  
connector for  
discontinuos  
connection  
NL19023

 Male power  
connector for  
discontinuos  
connection  
NL19021

 ALIMENT. 40W  
24Vdc IP67  
NL62040

 CONNETTORE  
ALIMENTAZIONE +  
TAPPO  
NL19052

 ALIMENT. 70W  
24Vdc IP67  
NL89080

 ALIMENT. 150W  
24Vdc IP67  
NL62880

 LINEALED STAFFA  
GIUNZIONE  
C/CASSA  
NL75810