

# LineaLed Wallwasher 25W - EL 3000K



IP65/67  

## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

Walk-over and drive-over recessed floor installation. Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection. Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture.


24Vdc remote ballast.

Connect a maximum number of 3 fixtures in a continuous line.

Technical features of light fixtures in compliance with EN60598-1.

Installation must be carried out by specialized personnel. Carefully follow the instructions.

## TECHNICAL DRAWINGS

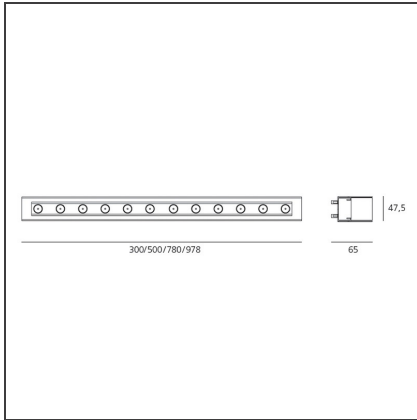

## FEATURES

<b>Article Code:</b>	NL17322ELK0	<b>Material:</b>	Aluminium, transparent tempered glass.
<b>Colour:</b>	Silver gray	<b>Series:</b>	Outdoor
<b>Installation:</b>	Recessed	<b>Area contract:</b>	Outdoor

## DIMENSIONS

<b>Length:</b>	cm 78	<b>Impact Resistance:</b>	IK07
<b>Width:</b>	cm 4,8		
<b>Height:</b>	cm 9		
<b>Weight:</b>	kg 2.2		

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	3	<b>Voltage:</b>	24Vdc
<b>Watt:</b>	8,5W		
<b>Delivered lumens output (lm):</b>	1776lm		
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	Electronic	<b>Delivered lumens output (lm):</b>	1248lm
<b>Watt:</b>	25W	<b>CCT:</b>	3000K
<b>Voltage:</b>	24 Vdc	<b>CRI:</b>	80

## Notes

### Flood optic

Wide luminous flow suitable for lighting large areas. (40° optic)

**ACCESSORIES**



Housing end cap  
(pair) - 46,5 x 62,5  
x 1,5mm  
NL76750



Female power  
connector for  
discontinuous  
connection  
NL19023



Male power  
connector for  
discontinuous  
connection  
NL19021



Housing L=982mm  
NL76700



Cassaforma  
L=300mm  
NL76740



Cassaforma  
L=500mm  
NL76730



Cassaforma  
L=780mm  
NL76710



ALIMENT. 40W  
24Vdc IP67  
NL62040



CONNETTORE  
ALIMENTAZIONE +  
TAPPO  
NL19052



ALIMENT. 70W  
24Vdc IP67  
NL89080



ALIMENT. 150W  
24Vdc IP67  
NL62880



LINEALED STAFFA  
GIUNZIONE  
C/CASSA  
NL75810