

LineaLed Wallwasher 34W - 12° 3000K



IP65/67  

DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

Walk-over and drive-over recessed floor installation. Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection. Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture.


24Vdc remote ballast.

Connect a maximum number of 10 fixtures in a continuous line.

Technical features of light fixtures in compliance with EN60598-1.

Installation must be carried out by specialized personnel. Carefully follow the instructions.

TECHNICAL DRAWINGS

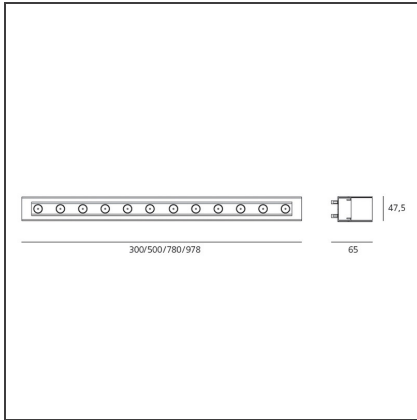

FEATURES

Article Code:	NL1732310K0	Material:	Aluminium, transparent tempered glass.
Colour:	Silver gray	Series:	Outdoor
Installation:	Recessed	Area contract:	Outdoor

DIMENSIONS

Length:	cm 97.8	Impact Resistance:	IK07
Width:	cm 4.8		
Height:	cm 9		
Weight:	kg 2.8		

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	4	Voltage:	24Vdc
Watt:	8,5W		
Delivered lumens output (lm):	1776lm		
Type:	0		
Class:	A		

LUMINAIRE

Power Supply:	Electronic	Delivered lumens output (lm):	1665lm
Watt:	34W	CCT:	3000K
Voltage:	24 Vdc	CRI:	80

Notes

Spot optic (10° optic)

Concentrated luminous flow to highlight details avoiding unwanted light dispersion.

ACCESSORIES



Housing end cap
(pair) - 46,5 x 62,5
x 1,5mm
NL76750



Female power
connector for
discontinuous
connection
NL19023



Male power
connector for
discontinuous
connection
NL19021



Housing L=982mm
NL76700



Cassaforma
L=300mm
NL76740



Cassaforma
L=500mm
NL76730



Cassaforma
L=780mm
NL76710



ALIMENT. 40W
24Vdc IP67
NL62040



CONNETTORE
ALIMENTAZIONE +
TAPPO
NL19052



ALIMENT. 70W
24Vdc IP67
NL89080



ALIMENT. 150W
24Vdc IP67
NL62880



LINEALED STAFFA
GIUNZIONE
C/CASSA
NL75810