

LineaLed WW Adjustable 8,5W - 12° 3000K



IP65/67  


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

Light fixture with high-performance LED light sources. Walk-over and drive-over recessed floor installation. Monochromatic light. Composed by body in extruded aluminium, protection glass. Adjustment brackets in die-cast aluminium. Electrical connection to the ballast by means of 100cm-long two-pole cable H05RN-F, with IP67 quick-release terminal board supplied with the fixture. Polycarbonate end caps with silicone gasket. 8mm-thick non-slip transparent tempered glass. 24Vdc remote ballast. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

TECHNICAL DRAWINGS

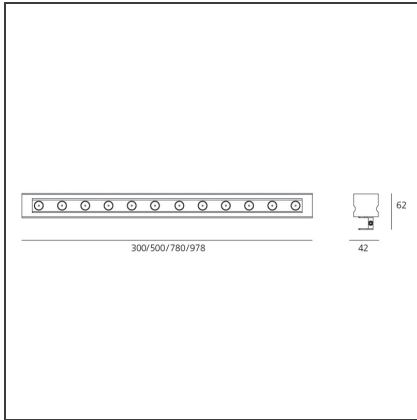

FEATURES

Article Code:	NL1733010K0	Material:	Aluminium, transparent tempered glass.
Colour:	Silver gray	Series:	Outdoor
Installation:	Recessed	Area contract:	Outdoor

DIMENSIONS

Length:	cm 30	Impact Resistance:	IK07
Width:	cm 4.2		
Height:	cm 6.2		
Weight:	kg 0.9		

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	Voltage:	24Vdc
Watt:	8,5W		
Delivered lumens output (lm):	1776lm		
Type:	0		
Class:	A		

LUMINAIRE

Power Supply:	Remote electronic	Delivered lumens output (lm):	416lm
Watt:	8,5W	CCT:	3000K
Voltage:	24Vdc	CRI:	80

Notes

Spot optic Concentrated luminous flow to highlight details avoiding unwanted light dispersion. (10° optic)

ACCESSORIES

NO
IMAGE
AVAILABLE

ALIMENT. 40W
24Vdc IP67
NL62040

NO
IMAGE
AVAILABLE

ALIMENT. 70W
24Vdc IP67
NL89080

NO
IMAGE
AVAILABLE

ALIMENT. 150W
24Vdc IP67
NL62880