

LineaLed WW Adjustable 8,5W - EL 3000K



IP65/67  

DESIGN BY

Carlotta de Bevilacqua


DESCRIPTION

Light fixture with high-performance LED light sources.
Walk-over and drive-over recessed floor installation.
Monochromatic light.
Composed by body in extruded aluminium, protection glass.
Adjustment brackets in die-cast aluminium.
Electrical connection to the ballast by means of 100cm-long two-pole cable H05RN-F, with IP67 quick-release terminal board supplied with the fixture.
Polycarbonate end caps with silicone gasket. 8mm-thick non-slip transparent tempered glass.
24Vdc remote ballast.

Technical features of light fixtures in compliance with EN60598-1.

Installation must be carried out by specialized personnel. Carefully follow the instructions.

TECHNICAL DRAWINGS

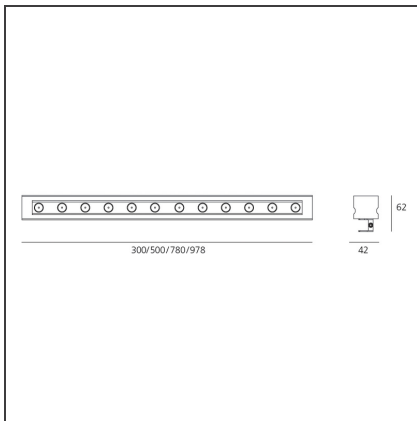

FEATURES

| | | | |
|----------------------|-------------|-----------------------|--|
| Article Code: | NL17330ELK0 | Material: | Aluminium, transparent tempered glass. |
| Colour: | Silver gray | Series: | Outdoor |
| Installation: | Recessed | Area contract: | Outdoor |

DIMENSIONS

| | | | |
|----------------|--------|---------------------------|------|
| Length: | cm 30 | Impact Resistance: | IK07 |
| Width: | cm 4.2 | | |
| Height: | cm 6.2 | | |
| Weight: | kg 0.9 | | |

INCLUDED SOURCES

| | | | |
|--------------------------------------|--------|-------------------------------|-------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | Voltage: | 24Vdc |
| Watt: | 8,5W | | |
| Delivered lumens output (lm): | 1776lm | | |
| Type: | 0 | | |
| Class: | A | | |

LUMINAIRE

| | | | |
|----------------------|-------------------|--------------------------------------|-------|
| Power Supply: | Remote electronic | Delivered lumens output (lm): | 416lm |
| Watt: | 8,5W | CCT: | 3000K |
| Voltage: | 24Vdc | CRI: | 80 |

Notes

Flood optic
Wide luminous flow suitable for lighting large areas.(40°optic)

ACCESSORIES

NO
IMAGE
AVAILABLE

ALIMENT. 40W
24Vdc IP67
NL62040

NO
IMAGE
AVAILABLE

ALIMENT. 70W
24Vdc IP67
NL89080

NO
IMAGE
AVAILABLE

ALIMENT. 150W
24Vdc IP67
NL62880