

# Logico Garden 3x120



IP65 


## DESIGN BY

Michele De Lucchi

## DESCRIPTION

Designed for garden or pedestrian path lighting. The appliance consists of a lamp and a supporting pole. The lamp support - 450, 600, or 900 mm high - is made of chromed and painted EN-AW-6060 extruded aluminum. The base flange is made of painted electro galvanized iron, with holes for ground fixing by means of screws or plugs. The lamp body is made of EN-AB 47100 die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, anti-oxidising primer, polyester painting. Metallised polycarbonate reflectors. Highly transparent methacrylate screen, with shiny shock-resistant and anti-UV finish. AISI 316 fixing screws and silicon seals. Provided with cable and IP68 connector for connection to the mains cables with 5 to 13,5 mm diameters. Technical specifications comply with EN60598-1.

## TECHNICAL DRAWINGS

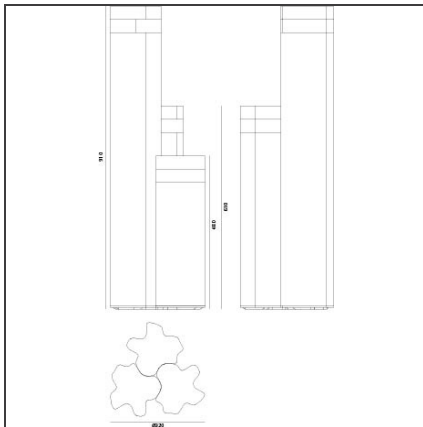

## FEATURES

<b>Article Code:</b>	T416700W00	<b>Series:</b>	Scenarios
<b>Colour:</b>	Anthracite Grey		
<b>Installation:</b>	Bollard, Floor		

## DIMENSIONS

<b>Height:</b>	cm 48	<b>Impact Resistance:</b>	IK10
<b>Max Extension Height:</b>	cm 91	<b>Glow Wire Test:</b>	650

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	3	<b>Color Tolerance:</b>	2SDCM
<b>Watt:</b>	15W	<b>CRI:</b>	80 typ
<b>Delivered lumens output (lm):</b>	294lm	<b>Efficacy:</b>	20lm/W
<b>Type:</b>	0	<b>Service Life:</b>	L70(6K)>36.300h
<b>Class:</b>	A		

## LUMINAIRE

<b>Watt:</b>	45W	<b>Delivered lumens output (lm):</b>	952lm
<b>Voltage:</b>	220V-240V	<b>CCT:</b>	3000K
		<b>Efficiency:</b>	23%
		<b>Efficacy:</b>	21.16lm/W
		<b>CRI:</b>	90