


Logico Garden 60

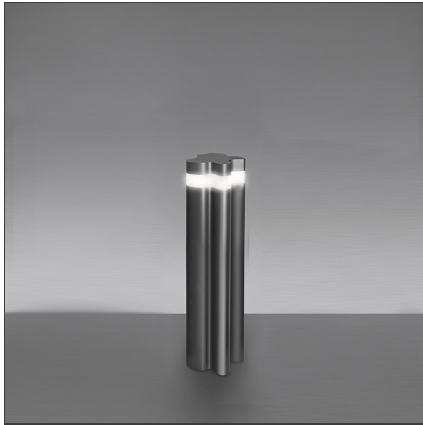

IP65 


DESIGN BY

Michele De Lucchi

DESCRIPTION

Designed for garden or pedestrian path lighting. The appliance consists of a lamp and a supporting pole. The lamp support - 450, 600, or 900 mm high - is made of chromed and painted EN-AW-6060 extruded aluminum. The base flange is made of painted electro galvanized iron, with holes for ground fixing by means of screws or plugs. The lamp body is made of EN-AB 47100 die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, anti-oxidising primer, polyester painting. Metallised polycarbonate reflectors. Highly transparent methacrylate screen, with shiny shock-resistant and anti-UV finish. AISI 316 fixing screws and silicon seals. Provided with cable and IP68 connector for connection to the mains cables with 5 to 13,5 mm diameters. Technical specifications comply with EN60598-1.

TECHNICAL DRAWINGS

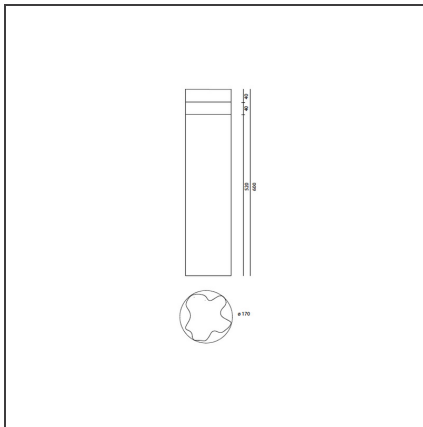

FEATURES

Article Code:	T416900W00	Material:	Aluminum, polycarbonate
Colour:	Anthracite Grey	Series:	Scenarios
Installation:	Bollard, Floor		

DIMENSIONS

Height:	cm 60	Impact Resistance:	IK10
		Glow Wire Test:	650

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	Color Tolerance:	2SDCM
Watt:	15W	CRI:	80 typ
Delivered lumens output (lm):	294lm	Efficacy:	20lm/W
Type:	0	Service Life:	L70(6K)>36.300h
Class:	A		

LUMINAIRE

Watt:	15W	Delivered lumens output (lm):	317lm
Voltage:	220V-240V	CCT:	3000K
		Efficiency:	23%
		Efficacy:	21.13lm/W
		CRI:	90