

# Luceri LED Round Trim - Faceted Mirror Optics 3000K - Driver 50W Undimmable - White



IP20/44 without screen - 20/54 with screen




## DESIGN BY

Studio Artemide

## DESCRIPTION

Luceri LED and Kadro LED offer a modular range of professional downlighters, highly flexible, providing customisable lighting solutions for every need. Thanks to TrueWhite technology, colour temperature and colour rendering index are maintained constant throughout the lifespan of this product, guaranteeing a consistent light quality. The emission of versions with metal reflector is compliant with EN12464 and has UGR

## TECHNICAL DRAWINGS

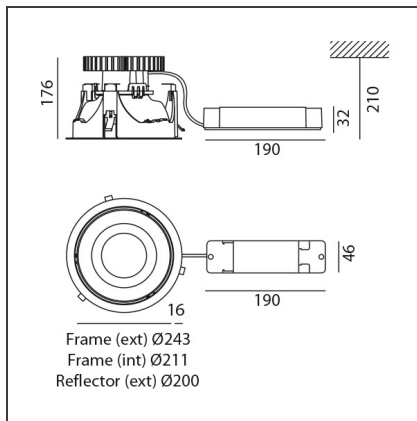

## FEATURES

|                      |                   |                       |                           |
|----------------------|-------------------|-----------------------|---------------------------|
| <b>Article Code:</b> | BB02001 DV1015    | <b>Series:</b>        | Indoor                    |
| <b>Colour:</b>       | White             | <b>Area contract:</b> | Hospitality, null, Office |
| <b>Installation:</b> | Recessed, Ceiling |                       |                           |

## DIMENSIONS

|                        |         |                         |         |
|------------------------|---------|-------------------------|---------|
| <b>Width:</b>          | cm 17.6 | <b>Cutout diameter:</b> | cm 23   |
| <b>Height:</b>         | cm 21   | <b>Cutout shape:</b>    | Rounded |
| <b>Weight:</b>         | kg 1.5  |                         |         |
| <b>Recessed depth:</b> | cm 21   |                         |         |

## INCLUDED SOURCES

|                  |         |                               |       |
|------------------|---------|-------------------------------|-------|
| <b>Category:</b> | LED     | <b>Color temperature (K):</b> | 3000K |
| <b>Number:</b>   | 1       | <b>CRI:</b>                   | 90    |
| <b>Watt:</b>     | max 54W |                               |       |
| <b>Type:</b>     | 0       |                               |       |

## LUMINAIRE

|              |     |                                      |           |
|--------------|-----|--------------------------------------|-----------|
| <b>Watt:</b> | 54W | <b>Delivered lumens output (lm):</b> | 4528lm    |
|              |     | <b>CCT:</b>                          | 3000K     |
|              |     | <b>Efficiency:</b>                   | 83%       |
|              |     | <b>Efficacy:</b>                     | 83.85lm/W |
|              |     | <b>CRI:</b>                          | 90        |

## Notes

Driver 220/240Vac 50/60Hz supplied separately.

**ACCESSORIES**

Transparent  
polycarbonate  
screen  
M239200



Opal screen in  
PMMA  
M239700



Prismoptic screen  
in polycarbonate  
M239600