



Luceri LED Round Trim - LED High-Performance Faceted Mirror Optics 19W 4000K - White



IP20/44 without screen - 20/54 with screen

Dimmerable: +  -

TECHNICAL DRAWINGS

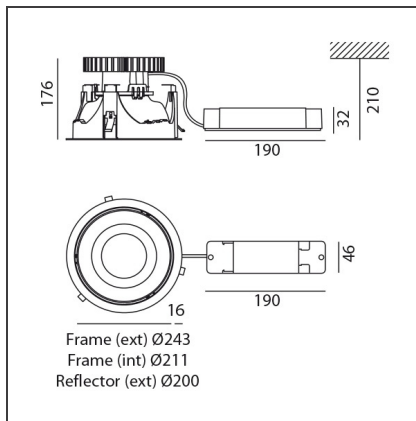

DESIGN BY

Studio Artemide

DESCRIPTION

Luceri LED and Kadro LED offer a modular range of professional downlighters, highly flexible, providing customisable lighting solutions for every need. Thanks to TrueWhite technology, colour temperature and colour rendering index are maintained constant throughout the lifespan of this product, guaranteeing a consistent light quality. The emission of versions with metal reflector is compliant with EN12464 and has UGR

FEATURES

| | | | |
|----------------------|-------------------|-----------------------|---------------------------|
| Article Code: | M244121 | Series: | Indoor |
| Colour: | White | Area contract: | Hospitality, null, Office |
| Installation: | Recessed, Ceiling | | |

DIMENSIONS

| | | | |
|----------------|---------|-------------------------|---------|
| Width: | cm 17.6 | Cutout diameter: | cm 23 |
| Height: | cm 21 | Cutout shape: | Rounded |
| Weight: | kg 1.5 | | |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|------------------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 16W | CRI: | =90 (min.) |
| Type: | 0 | Service Life: | L70(6K) > 36000h |
| Class: | A | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|-----------|
| Watt: | 19W | Delivered lumens output (lm): | 1790lm |
| | | CCT: | 4000K |
| | | Efficiency: | 100% |
| | | Efficacy: | 94.21lm/W |
| | | Dimmable Typology: | Dali |

Notes

Driver 220/240Vac 50/60Hz supplied separately.

ACCESSORIES

Transparent
polycarbonate
screen
M239200



Opal screen in
PMMA
M239700



Prismoptic screen
in polycarbonate
M239600