

Luceri LED Round Trimless - Faceted Mirror Optics 3000K - Driver 35W DALI



IP20/44 without screen - 20/54 with screen

☐ Dimmerable: + 0 -


DESIGN BY

Studio Artemide

DESCRIPTION

Luceri LED and Kadro LED offer a modular range of professional downlighters, highly flexible, providing customisable lighting solutions for every need. Thanks to TrueWhite technology, colour temperature and colour rendering index are maintained constant throughout the lifespan of this product, guaranteeing a consistent light quality. The emission of versions with metal reflector is compliant with EN12464 and has UGR

TECHNICAL DRAWINGS

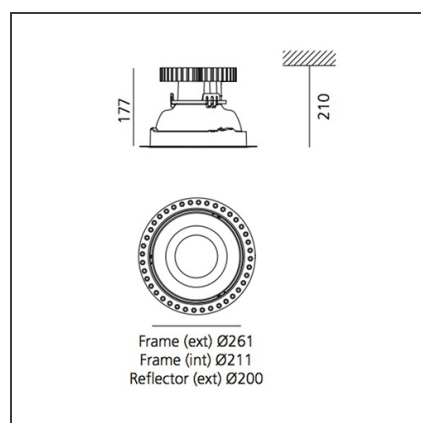

FEATURES

| | | | |
|---------------|-------------------|----------------|---------------------|
| Article Code: | BB01000 DV1018 | Series: | Indoor |
| Installation: | Recessed, Ceiling | Area contract: | Hospitality, Office |
| Environment: | Indoor | | |

DIMENSIONS

| | | | |
|---------|---------|------------------|---------|
| Width: | cm 17.7 | Cutout diameter: | cm 21.6 |
| Height: | cm 21 | Cutout shape: | Rounded |
| Weight: | kg 1.6 | | |

INCLUDED SOURCES

| | | | |
|-----------|---------|------------------------|-------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | CRI: | 90 |
| Watt: | max 54W | | |
| Type: | 0 | | |

LUMINAIRE

| | | | |
|---------------------------|-----|-------------------------------|-----------|
| Transformer availability: | 35W | Delivered lumens output (lm): | 2600lm |
| Watt: | 27W | CCT: | 3000K |
| | | Efficiency: | 83% |
| | | Efficacy: | 96.30lm/W |
| | | CRI: | 90 |
| | | Dimmable Typology: | Dali |

Notes

Driver 220/240Vac 50/60Hz supplied separately. To be completed with recessed frame.

ACCESSORIES

Sharp edge trim
M240500



Support with
rounded edge trim
M240600



Transparent
polycarbonate
screen
M239200



Accessory for
ceiling installation
M239820



Opal screen in
PMMA
M239700



Prismoptic screen
in polycarbonate
M239600