

Minispot 37° 3000K



IP65  


DESIGN BY

Studio Artemide

DESCRIPTION

Light fixture with high-performance LED light sources. Ground, floor, wall installation. Composed by body, metal ring, diffuser in transparent polycarbonate. Body and metal ring in computer numerical control machined billet anticorrosional aluminium. Painted spot with 2-stage outdoor treatment: primer, outdoor paint. Silicone gaskets. 100cm-long two-pole connection cable H05RN-F. Picket for ground installation in galvanized sheet iron. Technical features of light fixtures in compliance with EN60598-1 and part 2-13.

TECHNICAL DRAWINGS

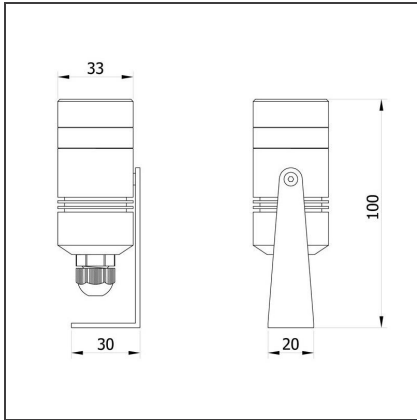

FEATURES

| | | | |
|----------------------|----------------------|-----------------------|---------------|
| Article Code: | NL7029ELK0 | Series: | Outdoor |
| Colour: | Silver | Area contract: | null, Outdoor |
| Installation: | Floor, Wall, Ceiling | | |

DIMENSIONS

| | |
|----------------|-------|
| Width: | cm 2 |
| Height: | cm 10 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|--------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | LED current: | 700 mA |
| Watt: | 3 W | | |
| Type: | 0 | | |
| Class: | A | | |

LUMINAIRE

| | | | |
|--------------|----|--------------------------------------|-----------|
| Watt: | 3W | Delivered lumens output (lm): | 95lm |
| | | CCT: | 3000K |
| | | Efficiency: | 100% |
| | | Efficacy: | 31.67lm/W |
| | | CRI: | 80 |

Notes

Fixed optic. PMMA lenses. Beams (40°). White monochromatic LEDs available Colour temperatures: Warm = 3000K Neutral = 4000K

ACCESSORIES

NO
IMAGE
AVAILABLE

EGO PICCHETTO
NL97150

NO
IMAGE
AVAILABLE

ALIMENT. 12W
700mA IP67
NL19024

NO
IMAGE
AVAILABLE

ALIMENT. 21W
700mA IP67
NL19028

NO
IMAGE
AVAILABLE

ALIMENT. 35W
700mA IP67
NL19029