

# Molla Anthracite gray



IP65   

## DESIGN BY


Ernesto Gismondi

## DESCRIPTION

Light fixture with 2 combined light beams: the large one with lighting function and the narrow one with decorative function. Wall installation: the fixture can be installed with the main beam pointed either downwards or upwards according to the kind of lighting desired (direct or indirect).

Materials: projector composed by a body in reinforced polymer and PMMA lenses, cap and terminal board in die-cast EN AB-47100 aluminium, tempered and silkscreened light-diffusing glasses with thickness of 4 mm.

## TECHNICAL DRAWINGS

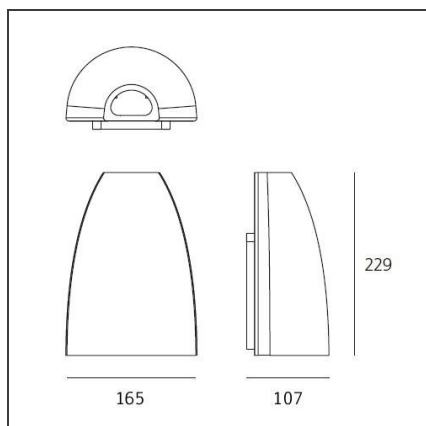

## FEATURES

<b>Article Code:</b>	T4190NLW10	<b>Material:</b>	Aluminum, composite technopolymer, methacrylate, silk screened glass
<b>Colour:</b>	Anthracite gray	<b>Series:</b>	Outdoor
<b>Installation:</b>	Wall	<b>Area contract:</b>	Residential
<b>Environment:</b>	Outdoor		

## DIMENSIONS

<b>Length:</b>	cm 16.3
<b>Width:</b>	cm 10.6
<b>Height:</b>	cm 22.9

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>CRI:</b>	80 typ
<b>Watt:</b>	3W		
<b>Delivered lumens output (lm):</b>	55lm		
<b>Type:</b>	0		
<b>Class:</b>	A		
<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>CRI:</b>	82
<b>Watt:</b>	10W		
<b>Delivered lumens output (lm):</b>	350lm		
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	Electronic Integrated	<b>Delivered lumens output (lm):</b>	407lm
<b>Watt:</b>	14W	<b>CCT:</b>	3000K
<b>Voltage:</b>	220V-240V	<b>CRI:</b>	80

## Notes

The large beam is obtained by the combination of a monochromatic LED light source with a reflector. The narrow beam is obtained by the combination of a monochromatic LED light source with a high-performance projector.

Effective power 14,3W.

LIGHT DISTRIBUTION

