


# Mouette Asymmetric - Fluo 2x24W + 2x54W 1900mm DALI



IP40/20    

Dimmerable: +  -


## DESIGN BY

Wilmotte & Industries

## DESCRIPTION

Single pendant with diffused lighting using 24W + 54W T16 fluorescent lamps and LED 80W. Solid opaline diffuser in moulded polypropylene. MOUETTE is available in 2 versions: symmetrical or asymmetrical. Electronic or DSI dimmable electronic ballast depending on the version. The upper part has an opening for easy installation and maintainance. Luminaire comes complete with 1900mm or 5900m long quick-adjustment steel suspension cables, ceiling plate and power cable. Light sources are included (3000K). Complies with standard EN60598-1 and other specific standards.

## TECHNICAL DRAWINGS

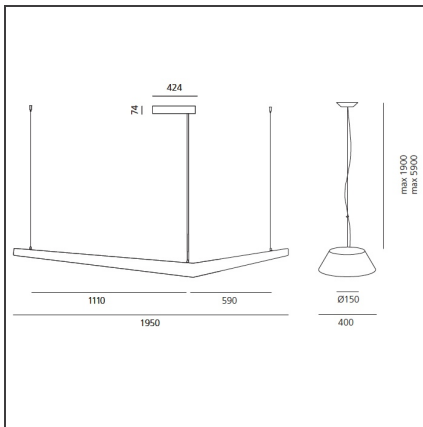

## FEATURES

<b>Article Code:</b>	L860510	<b>Material:</b>	Moulded polypropylene, aluminium
<b>Colour:</b>	White opaline	<b>Series:</b>	Indoor
<b>Installation:</b>	Suspension	<b>Area contract:</b>	Hospitality, Retail, Office, Culture

## DIMENSIONS

<b>Length:</b>	cm 195	<b>Impact Resistance:</b>	N.D.
<b>Weight:</b>	kg 6.8	<b>Glow Wire Test:</b>	750
<b>Base Width:</b>	cm 7.4		
<b>Base Diameter:</b>	cm 42.4		
<b>Max Height from ceiling:</b>	cm 190		

## INCLUDED SOURCES

<b>Category:</b>	FLUO	<b>Color Rendering:</b>	85
<b>Number:</b>	2	<b>Color temperature (K):</b>	3000K
<b>Watt:</b>	54W		
<b>Lbs:</b>	T16(G5)		
<b>Socket:</b>	G5		
<b>Duration (h):</b>	20000h		
<b>Category:</b>	FLUO	<b>Color Rendering:</b>	85
<b>Number:</b>	2	<b>Color temperature (K):</b>	3000 K
<b>Watt:</b>	24W		
<b>Lbs:</b>	T16(G5)		
<b>Socket:</b>	G5		
<b>Duration (h):</b>	20000h		

## LUMINAIRE

<b>Power Supply:</b>	Electronic dimmable DSI integrated	<b>Delivered lumens output (lm):</b>	6562lm
<b>Watt:</b>	171.0W	<b>CCT:</b>	K
<b>Voltage:</b>	220V-240V	<b>Efficiency:</b>	53%
		<b>Efficacy:</b>	38.38lm/W
		<b>Dimmable Typology:</b>	Dali

## Notes

Height: 1900mm max.