


Mouette Asymmetric - Fluo 2x24W + 2x54W 5900mm DALI



IP40/20    

Dimmerable: +  -


DESIGN BY

Wilmotte & Industries

DESCRIPTION

Single pendant with diffused lighting using 24W + 54W T16 fluorescent lamps and LED 80W. Solid opaline diffuser in moulded polypropylene. MOUETTE is available in 2 versions: symmetrical or asymmetrical. Electronic or DSI dimmable electronic ballast depending on the version. The upper part has an opening for easy installation and maintenance. Luminaire comes complete with 1900mm or 5900mm long quick-adjustment steel suspension cables, ceiling plate and power cable. Light sources are included (3000K). Complies with standard EN60598-1 and other specific standards.

TECHNICAL DRAWINGS

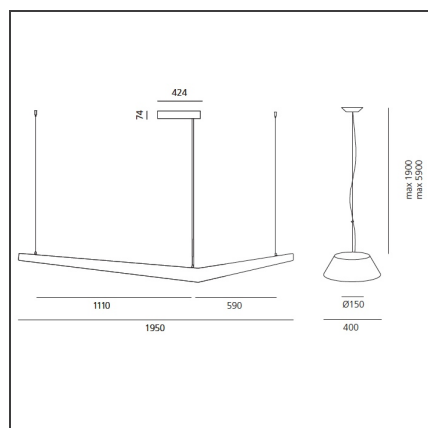

FEATURES

Article Code:	L860550	Material:	Moulded polypropylene, aluminium
Colour:	White opaline	Series:	Indoor
Installation:	Suspension	Area contract:	Hospitality, Retail, Office, Culture

DIMENSIONS

Length:	cm 195	Impact Resistance:	N.D.
Weight:	kg 6.9	Glow Wire Test:	750
Base Width:	cm 7.4		
Base Diameter:	cm 42.4		
Max Height from ceiling:	cm 590		

INCLUDED SOURCES

Category:	FLUO	Color Rendering:	85
Number:	2	Color temperature (K):	3000K
Watt:	54W		
Lbs:	T16(G5)		
Socket:	G5		
Duration (h):	20000h		
Category:	FLUO	Color Rendering:	85
Number:	2	Color temperature (K):	3000 K
Watt:	24W		
Lbs:	T16(G5)		
Socket:	G5		
Duration (h):	20000h		

LUMINAIRE

Power Supply:	Electronic Dimmable DSI integrated	Delivered lumens output (lm):	6562lm
Watt:	171.0W	CCT:	K
Voltage:	220V-240V	Efficiency:	53%
		Efficacy:	38.38lm/W
		Dimmable Typology:	Dali

Notes

Height: 5900mm max.