


Mouette Symmetric 2500 - Fluo 4x54W 5900mm DALI



IP40/20    

Dimmerable: +  -


DESIGN BY

Wilmotte & Industries

DESCRIPTION

Single pendant with diffused lighting using 24W and 54W T16 fluorescent lamps. Solid opaline diffuser in moulded polypropylene. MOUETTE is available in 2 versions: symmetrical or asymmetrical. LOR: 55%. Light distribution: 74% direct and 26% indirect. Electronic or DSI dimmable electronic ballast depending on the version. The upper part has an opening for easy installation and maintainance. Luminaire comes complete with 2m or 6m long quick-adjustment steel suspension cables, ceiling plate and power cable. T16 light sources are included (3000K). Complies with standard EN60598-1 and other specific standards.

TECHNICAL DRAWINGS

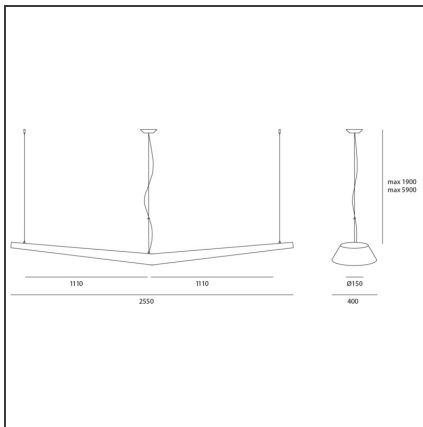

FEATURES

Article Code:	L864150	Material:	Moulded polypropylene, aluminium
Colour:	White opaline	Series:	Indoor
Installation:	Suspension	Area contract:	Hospitality, Retail, Office, Culture

DIMENSIONS

Length:	cm 255	Glow Wire Test:	750
Width:	cm 40		
Weight:	kg 8.6		
Max Height from ceiling:	cm 590		

INCLUDED SOURCES

Category:	FLUO	Color Rendering:	85
Number:	4	Color temperature (K):	3000K
Watt:	54W		
Lbs:	T16(G5)		
Socket:	G5		
Duration (h):	20000h		

LUMINAIRE

Power Supply:	Electronic Dimmable DSI integrated	Delivered lumens output (lm):	10314lm
Watt:	216.0W	CCT:	4000K
Voltage:	220V-240V	Efficiency:	58%
		Efficacy:	47.75lm/W
		CRI:	80

Notes

Height: 5900mm max.