

Obice Micro - 32° IP40 - Black



IP40


DESIGN BY

Alessandro Pedretti

DESCRIPTION

Light fixture with high-performance LED light sources. Wall installation. Composed by: body, adjustable joint, terminal board and protective screen. Body in injection mould of aluminium. Terminal base and adjustable joint in injection mould of aluminium. Protection screen in tempered glass, 3mm-thick, with black opal serigraphy. Integrated driver. Tilting angle +35°/-125° Rotation on horizontal axis: 359°. Wiring to be carried out by means of a plug located in the terminal base. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

TECHNICAL DRAWINGS

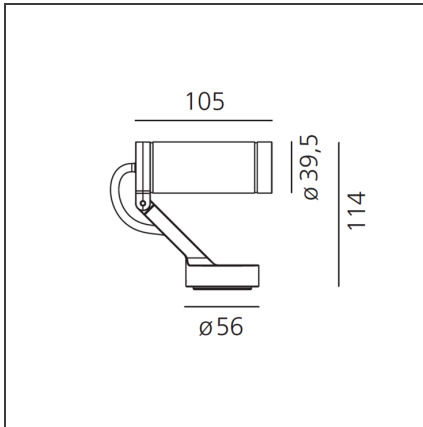

FEATURES

Article Code:	M3160WFLW10	Material:	Steel, silk screened glass
Colour:	Black	Series:	Outdoor
Installation:	Wall		

DIMENSIONS

Length:	cm 10.5
Height:	cm 11.4
Weight:	kg 0.3
Base Diameter:	cm 5.6

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	CRI:	80
Watt:	3W		
Type:	0		
Class:	A		

LUMINAIRE

Watt:	3W	Delivered lumens output (lm):	115lm
Voltage:	220/240Vac	CCT:	3000K
		Efficiency:	87%
		Efficacy:	38.41lm/W
		CRI:	80