

Obice Mini - 19° 3000K - Black



IP65 


DESIGN BY

Alessandro Pedretti

DESCRIPTION

Lights fixture with high-performance LED light sources. Wall installation. Composed by: body, adjustable joint, terminal board and protective screen. Body in injection mould of aluminium. Terminal base and adjustable joint in injection mould of aluminium. Flange, protection screen in tempered glass, 4mm-thick, with black opal serigraphy. 24Vdc remote driver not included. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K Tilting angle +35°/-125° Rotation on horizontal axis: 359°. Wiring to be carried out by means of a plug located in the terminal base. IP Rating IP65. Insulation class I (Obice), insulation class III (Obice mini). Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

TECHNICAL DRAWINGS

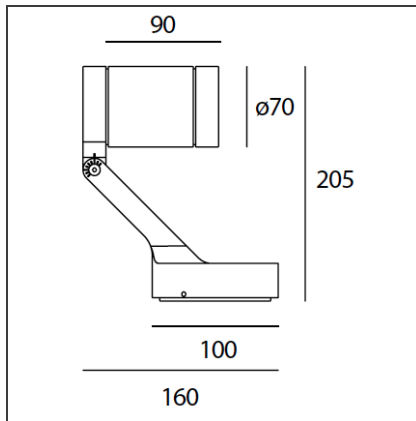

FEATURES

Article Code:	T430418W10	Material:	Steel, silk screened
Colour:	Black		glass
Installation:	Wall, Ceiling	Series:	Outdoor

DIMENSIONS

Length:	cm 16
Height:	cm 20.5
Weight:	kg 0.9

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	CRI:	80
Watt:	7W		
Delivered lumens output (lm):	284lm		
Type:	0		

LUMINAIRE

Power Supply:	Electronic not included	Delivered lumens output (lm):	505lm
Watt:	7W	CCT:	3000K
		CRI:	80

ACCESSORIES

Lens for elliptical
emission
T430700000



ALIMENT. 12W
24Vdc IP67
NL11027



ALIMENT. 40W
24Vdc IP67
NL62040



Filter holder black
T430600010



ALIMENT. 70W
24Vdc IP67
NL89080



ALIMENT. 150W
24Vdc IP67
NL62880