

Obice Mini - 34° 3000K - White



IP65 


DESIGN BY

Alessandro Pedretti

DESCRIPTION

Lights fixture with high-performance LED light sources. Wall installation. Composed by: body, adjustable joint, terminal board and protective screen. Body in injection mould of aluminium. Terminal base and adjustable joint in injection mould of aluminium. Flange, protection screen in tempered glass, 4mm-thick, with black opal serigraphy. 24Vdc remote driver not included. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K Tilting angle +35°/-125° Rotation on horizontal axis: 359°. Wiring to be carried out by means of a plug located in the terminal base. IP Rating IP65. Insulation class I (Obice), insulation class III (Obice mini). Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

TECHNICAL DRAWINGS

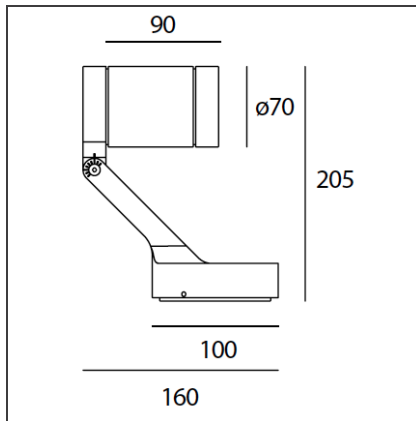

FEATURES

| | | | |
|----------------------|---------------|------------------|----------------------|
| Article Code: | T430434W20 | Material: | Steel, silk screened |
| Colour: | White | | glass |
| Installation: | Wall, Ceiling | Series: | Outdoor |

DIMENSIONS

| | |
|----------------|---------|
| Length: | cm 16 |
| Height: | cm 20.5 |
| Weight: | kg 0.9 |

INCLUDED SOURCES

| | | | |
|--------------------------------------|-------|-------------------------------|-------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | CRI: | 80 |
| Watt: | 7W | | |
| Delivered lumens output (lm): | 284lm | | |
| Type: | 0 | | |

LUMINAIRE

| | | | |
|----------------------|-------------------------|--------------------------------------|-------|
| Power Supply: | Electronic not included | Delivered lumens output (lm): | 460lm |
| Watt: | 7W | CCT: | 3000K |
| | | CRI: | 80 |

ACCESSORIES

Filter holder white
T430600020



Lens for elliptical
emission
T430700000




ALIMENT. 12W
24Vdc IP67
NL11027



ALIMENT. 40W
24Vdc IP67
NL62040



ALIMENT. 70W
24Vdc IP67
NL89080



ALIMENT. 150W
24Vdc IP67
NL62880