

**PAD 230V Semi-recessed Switchdim - 14,5W 3000K - 12°**



IP40  Dimmerable: 


**DESIGN BY**

Carlotta de Bevilacqua

**DESCRIPTION**

Adjustable projector for 12x1,08W high performing LED. Body made from aluminium and translucent plastic material. White LED with Warm White or Neutral White tone. Choice of 3 beam angles. Tilt angle of up to 90°, rotation of up to 358°. Integral power supply unit. Complies with standard EN60598-1 and other specific standards. Dimming control via external push-button (not provided).

**TECHNICAL DRAWINGS**

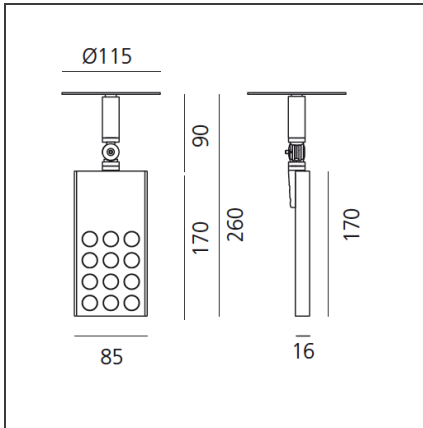

**FEATURES**

<b>Article Code:</b>	M200004	<b>Material:</b>	Aluminium, plastic
<b>Colour:</b>	Translucent/bright anodized	<b>Series:</b>	Indoor
<b>Installation:</b>	Projector, Track, Recessed, Ceiling	<b>Area contract:</b>	Retail, Culture
<b>Environment:</b>	Indoor	<b>Emission:</b>	Accent Lighting

**DIMENSIONS**

<b>Length:</b>	cm 8.5	<b>Cutout diameter:</b>	cm 6.7
<b>Width:</b>	cm 1.6	<b>Cutout shape:</b>	Rounded
<b>Height:</b>	cm 26	<b>Glow Wire Test:</b>	650
<b>Weight:</b>	kg 0.7		
<b>Inclination:</b>	cm 9,090		
<b>Rotation:</b>	cm 358		

**INCLUDED SOURCES**

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>CRI:</b>	80
<b>Watt:</b>	12W		
<b>Type:</b>	0		
<b>Class:</b>	A		

**LUMINAIRE**

<b>Power Supply:</b>	Electronic dimmable (Switchdim)	<b>Delivered lumens output (lm):</b>	825lm
<b>Watt:</b>	14.5W	<b>CCT:</b>	3000K
<b>Voltage:</b>	220V-240V	<b>Efficiency:</b>	100%
		<b>Efficacy:</b>	56.90lm/W
		<b>CRI:</b>	0

**Notes**

LED 13W 2x6° 3000K - Dimmerabile (Switchdim)