

## Parabola80\_round\_12W\_52°\_3000K\_White



IP40 


### DESIGN BY

Studio Artemide

### DESCRIPTION

Light fixture with high-performance LED light sources, consists of: frame, body, lens, fixing springs. Frame in injection mould of aluminium. Heat sink body in extruded aluminium. Lens in polycarbonate with 3 different versions of beam. Fixing springs in harmonic steel. Electrical connection to the driver by means of a FEP-FEP cable and a terminal board. Technical features of light fixtures in compliance with EN60598-1.

### TECHNICAL DRAWINGS

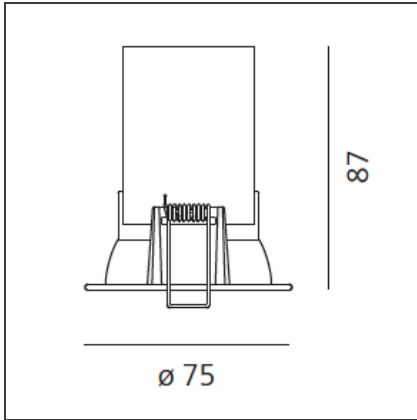

### FEATURES

|                      |                   |                       |   |
|----------------------|-------------------|-----------------------|---|
| <b>Article Code:</b> | NL1906340K006     | <b>Material:</b>      | Aluminium   |
| <b>Colour:</b>       | White             | <b>Series:</b>        | Indoor  |
| <b>Installation:</b> | Recessed, Ceiling | <b>Area contract:</b> | Hospitality, null, Retail, Office, Culture, Residential |
| <b>Environment:</b>  | Indoor            |                       |   |

### DIMENSIONS

|                        |        |                         |         |
|------------------------|--------|-------------------------|---------|
| <b>Weight:</b>         | kg 0.3 | <b>Cutout diameter:</b> | cm 6.8  |
| <b>Recessed depth:</b> | cm 8.7 | <b>Cutout shape:</b>    | Rounded |

### INCLUDED SOURCES

|                                      |        |                               |                |
|--------------------------------------|--------|-------------------------------|----------------|
| <b>Category:</b>                     | LED    | <b>Color temperature (K):</b> | 3000K          |
| <b>Number:</b>                       | 1      | <b>Color Tolerance:</b>       | 3SDCM          |
| <b>Watt:</b>                         | 12W    | <b>CRI:</b>                   | 90             |
| <b>Delivered lumens output (lm):</b> | 1512lm | <b>Efficacy:</b>              | 126lm/W        |
| <b>Type:</b>                         | 0      | <b>Service Life:</b>          | L70(6K)>60000h |
| <b>Class:</b>                        | A      |                               |                |

### LUMINAIRE

|                      |   |                                      |         |
|----------------------|---|--------------------------------------|---------|
| <b>Power Supply:</b> | Driver 350 mA SELV supplied separately. | <b>Delivered lumens output (lm):</b> | 1145lm  |
| <b>Watt:</b>         | 12W                                     | <b>CCT:</b>                          | 3000K   |
|                      |   | <b>Efficiency:</b>                   | 76%     |
|                      |   | <b>Efficacy:</b>                     | 84 lm/W |

**ACCESSORIES**

---

NO  
IMAGE  
AVAILABLE

ALIMENTATORE  
16.8W  
350/500/700MA  
DALI  
NL104210

NO  
IMAGE  
AVAILABLE

DRIVER cc 15W  
350mA 220-240  
125 38 23 1max  
Non dimmable  
M077500