


Sharp - 44W 17° 3000K Trim White

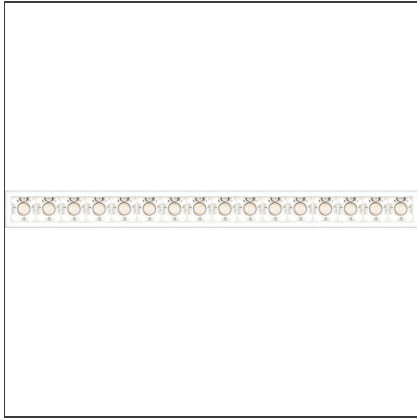

IP20  


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

High-efficiency patented optical system that combines polynomial perspective to an element that shields geometrically the angle of vision of the beam. High uniformity of illumination and full emission control. Complete absence of possible light flaws as stains and multi-shadows. Recessed depth 60 mm. Suitable for a ceiling of 1 to 25 mm. Available in trim versions, trimless and SMD.

TECHNICAL DRAWINGS

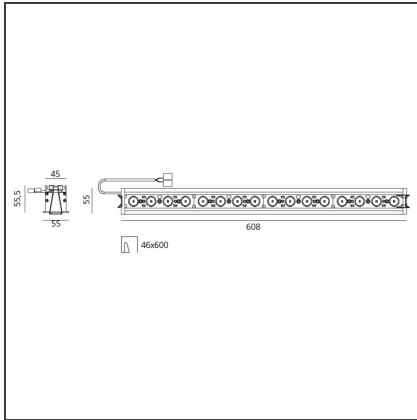

FEATURES

| | | | |
|----------------------|-------------------|----------------|--------|
| Article Code: | AF25001 | Series: | Indoor |
| Colour: | White | | |
| Installation: | Recessed, Ceiling | | |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|----------------|---------|
| Length: | cm 60.8 |
| Width: | cm 5.5 |
| Height: | cm 5.5 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | | |
| Watt: | 44W | | |
| Type: | 0 | | |
| Class: | A | | |

LUMINAIRE


| | | | |
|--------------|-----|--------------------------------------|-----------|
| Watt: | 44W | Delivered lumens output (lm): | 3215lm |
| | | CCT: | 3000K |
| | | Efficiency: | 76% |
| | | Efficacy: | 73.08lm/W |
| | | CRI: | 90 |

ACCESSORIES


Screen 4x White
AF95201




Screen 4x Black
AF95204




Driver 50 W
900mA
DV1005



Driver 40 W
900mA
DV1006



Driver 55 W
900mA
DV1007



Sharping wall
grazer lens Kit
(4pcs) - 26°x70°
elliptical lenses kit.
It has to be used
on top of S 20°
reflectors to get
an elliptical beam
(greter axis along
the module
length). It contains
4 lenses.
AF06000