

# Sostituto Pole High Flux



IP65 


## DESIGN BY

Ernesto Gismondi

## DESCRIPTION

Light fixture with direct emission, with monochromatic LED light sources. Pole installation (pole not supplied). Consists of lighting unit and 90° adjustable pole joint. Die-cast EN-AB 47100 aluminium lighting unit with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Asymmetrical high-efficiency PMMA optical units. High-transparency shock-resistant polycarbonate screens. Composed by 3 interchangeable optical units. AISI 316 fixing screws and silicone gaskets. Suitable for ME3a and ME4a road lighting. Technical features in compliance with EN60598-1-2-3. Protection level from 4KV impulse overvoltage. IP Rating IP66. ENEC approved. Insulation class II.

## TECHNICAL DRAWINGS

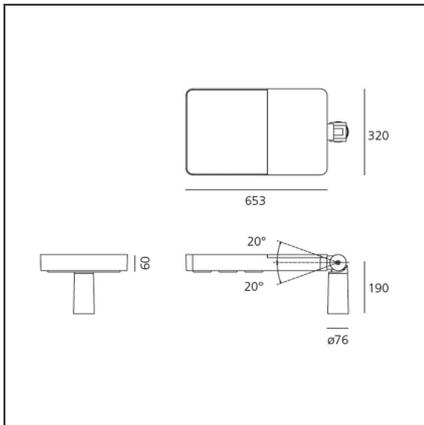

## FEATURES

|                      |                |                  |                                       |
|----------------------|----------------|------------------|---------------------------------------|
| <b>Article Code:</b> | T4183ELH00     | <b>Material:</b> | Aluminum, polycarbonate, methacrilate |
| <b>Colour:</b>       | Grey antracite | <b>Series:</b>   | Outdoor                               |
| <b>Installation:</b> | Pole, Floor    |                  |                                       |

## DIMENSIONS

|                |         |                           |      |
|----------------|---------|---------------------------|------|
| <b>Length:</b> | cm 60.8 | <b>Impact Resistance:</b> | IK10 |
| <b>Width:</b>  | cm 32   | <b>Glow Wire Test:</b>    | 750  |
| <b>Height:</b> | cm 600  |                           |      |

## INCLUDED SOURCES

|                  |      |                               |       |
|------------------|------|-------------------------------|-------|
| <b>Category:</b> | LED  | <b>Color temperature (K):</b> | 4000K |
| <b>Number:</b>   | 1    |                               |       |
| <b>Watt:</b>     | 106W |                               |       |
| <b>Type:</b>     | 0    |                               |       |
| <b>Class:</b>    | A    |                               |       |

## LUMINAIRE

|                 |           |                                      |        |
|-----------------|-----------|--------------------------------------|--------|
| <b>Watt:</b>    | 106W      | <b>Delivered lumens output (lm):</b> | 11261m |
| <b>Voltage:</b> | 220V-240V | <b>CCT:</b>                          | 4000K  |
|                 |           | <b>CRI:</b>                          | 70     |