

Sostituto Spot EL



IP65 


DESIGN BY

Ernesto Gismondi

DESCRIPTION

Light fixture with direct emission, with monochromatic LED light sources. Floor, wall, eaves installation. Consists of lighting unit, wiring terminal board and fixing plate. Rotation on the base +/-10°, body tilting +/-90. Positioning is maintained by means of locking dowels. EN AB47100 aluminium body and terminal board, silicone gaskets. Electronic ballast integrated in the body. Polycarbonate diffuser silicone-sealed to the lens supporting unit. Composed by 3 interchangeable optical units. IP67 connector for the electrical connection to the mains, which can be located in the base compartment and is suitable for 5-13.5mm diameter cables. LED circuits with PMMA lenses in 3 beam versions: 5°, 11,5° and elliptical 12x20°. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the lighting fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP66. Protection level from 4KV impulse overvoltage. Insulation class II.

TECHNICAL DRAWINGS

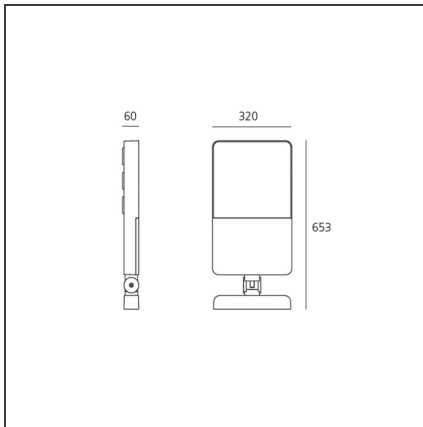

FEATURES

Article Code:	T4184ELW00	Material:	Aluminum, polycarbonate, methacrilate
Colour:	Grey antracite	Series:	Outdoor
Installation:	Projector, Floor		

DIMENSIONS

Length:	cm 32	Impact Resistance:	IK10
Width:	cm 6	Glow Wire Test:	750
Height:	cm 65.3		

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	CRI:	80
Watt:	106W		
Type:	0		
Class:	A		

LUMINAIRE

Watt:	106W	Delivered lumens output (lm):	8795lm
Voltage:	220V-240V	CCT:	3000K
		CRI:	80