


# Spike 12W - EL 3000K

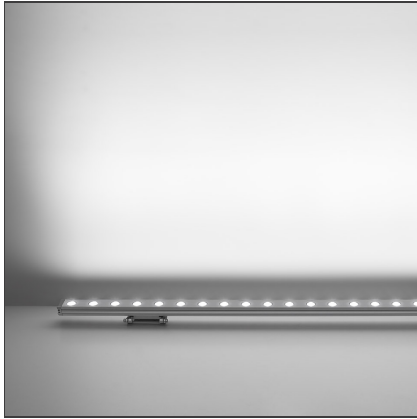

IP65  


## DESIGN BY

Studio Artemide

## DESCRIPTION

Light fixture with high-performance LED light sources. Wall/ceiling installation. Monochromatic version or RGB version. Body in extruded EN AW6060 T5 aluminium. Diffuser in 3mm-thick transparent metacrylate PMMA. Diffuser in 1,5mm-thick transparent polycarbonate. Stoppers in die-cast aluminium with silicone gasket. Adjustable brackets in aluminium. Electrical connection to the ballast by means of a H05RN-F (monochrome) or a 4-poles silicon/rubber cable (RGB), with IP68 terminal board supplied with the fixture (IP65 version). 24Vdc remote ballast. Painted profile with 2-stage outdoor treatment: primer, outdoor paint. Antidazzle screen in painted extruded aluminium, upon request. Optics. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K RGB version with red, green and blue monochromatic LEDs. IP Rating IP65. Insulation class III. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel.

## TECHNICAL DRAWINGS

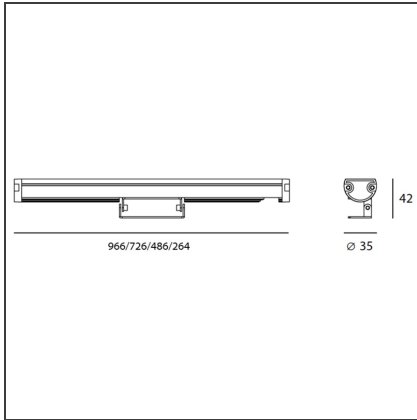

## FEATURES

<b>Article Code:</b>	T4300ELW00	<b>Material:</b>	Aluminium, transparent metacrylate PMMA
<b>Colour:</b>	Aluminium	<b>Series:</b>	Outdoor
<b>Installation:</b>	Projector, Wall	<b>Area contract:</b>	Outdoor

## DIMENSIONS

<b>Length:</b>	cm 26.4
<b>Height:</b>	cm 4.2
<b>Base Diameter:</b>	cm 3.5

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Voltage:</b>	24 Vdc
<b>Watt:</b>	12W		
<b>Delivered lumens output (lm):</b>	444lm		
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	Remote electronic	<b>Delivered lumens output (lm):</b>	593lm
<b>Watt:</b>	12W	<b>CCT:</b>	3000K
<b>Voltage:</b>	24Vdc	<b>Efficacy:</b>	50lm/W

**ACCESSORIES**

NO  
IMAGE  
AVAILABLE

ALIMENT. 40W  
24Vdc IP67  
NL62040

NO  
IMAGE  
AVAILABLE

Schermo  
antiabbagliamento  
247mm  
T430801

NO  
IMAGE  
AVAILABLE

ALIMENT. 70W  
24Vdc IP67  
NL89080

NO  
IMAGE  
AVAILABLE

ALIMENT. 150W  
24Vdc IP67  
NL62880