


## Spike 36W - 13° 3000K

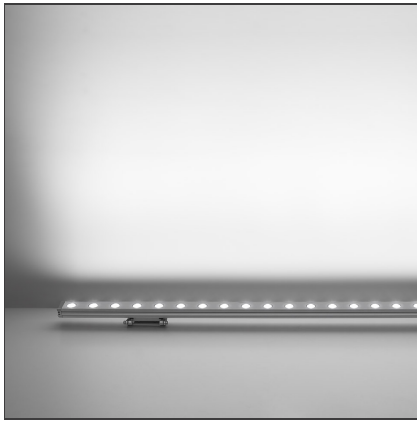

IP65  


### DESIGN BY

Studio Artemide

### DESCRIPTION

Light fixture with high-performance LED light sources. Wall/ceiling installation. Monochromatic version or RGB version. Body in extruded EN AW6060 T5 aluminium. Diffuser in 3mm-thick transparent metacrylate PMMA. Diffuser in 1,5mm-thick transparent polycarbonate. Stoppers in die-cast aluminium with silicone gasket. Adjustable brackets in aluminium. Electrical connection to the ballast by means of a H05RN-F (monochrome) or a 4-poles silicon/rubber cable (RGB), with IP68 terminal board supplied with the fixture (IP65 version). 24Vdc remote ballast. Painted profile with 2-stage outdoor treatment: primer, outdoor paint. Antidazzle screen in painted extruded aluminium, upon request. Optics. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K RGB version with red, green and blue monochromatic LEDs. IP Rating IP65. Insulation class III. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel.

### TECHNICAL DRAWINGS

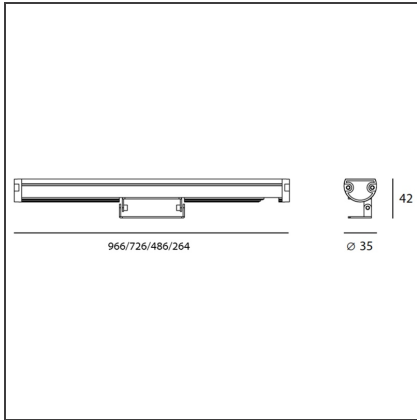

### FEATURES

<b>Article Code:</b>	T430210W00	<b>Material:</b>	Aluminium, transparent metacrylate PMMA
<b>Colour:</b>	Aluminium	<b>Series:</b>	Outdoor
<b>Installation:</b>	Projector, Wall	<b>Area contract:</b>	Outdoor

### DIMENSIONS

<b>Length:</b>	cm 72.6
<b>Height:</b>	cm 4.2
<b>Base Diameter:</b>	cm 3.5

### INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	3	<b>Voltage:</b>	24 Vdc
<b>Watt:</b>	12W		
<b>Delivered lumens output (lm):</b>	444lm		
<b>Type:</b>	0		
<b>Class:</b>	A		

### LUMINAIRE

<b>Power Supply:</b>	Remote electronic	<b>Delivered lumens output (lm):</b>	1782lm
<b>Watt:</b>	36W	<b>CCT:</b>	3000K
<b>Voltage:</b>	24Vdc	<b>Efficacy:</b>	50lm/W

**ACCESSORIES**

NO  
IMAGE  
AVAILABLE

ALIMENT. 40W  
24Vdc IP67  
NL62040

NO  
IMAGE  
AVAILABLE

SPIKE 80  
SCHERMO  
ANTIABBAGLIAMENTO  
NL50007

NO  
IMAGE  
AVAILABLE

Schermo  
antiabbagliamento  
709MM  
T430803

NO  
IMAGE  
AVAILABLE

ALIMENT. 70W  
24Vdc IP67  
NL89080

NO  
IMAGE  
AVAILABLE

ALIMENT. 150W  
24Vdc IP67  
NL62880